




REVISION DATA				
S/M	ECN	DESCRIPTION	DATE	APPROVED

## Technical Data

Material:  
 Pin: Brass, machined CuZn38Pb2  
 Plating:  
 Gold plated: 2µm/80µ"Ni, Full gold  
 Insulator (black): Black (PPS) UL94V-0

Electrical:  
 Current rating: 3Amps/contact max.  
 Contact resistance:  $\leq 4m\Omega$ /contact  
 Insulation resistance:  $\geq 5000M\Omega$  at V=500V  
 Dielectric withstanding Voltage: 1000V AC Min  
 Operating voltage: 60VAC/DC

Mechanical:  
 Operating temperatures: Gold plated: -55°C to +125°C  
 Tin plated: -40°C to +105°C  
 Critical dimensions:  $\Delta$

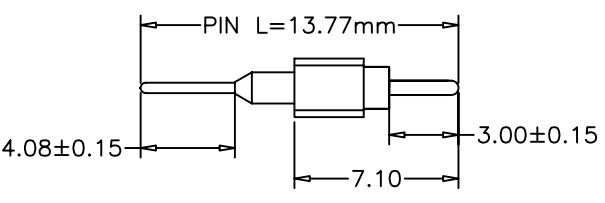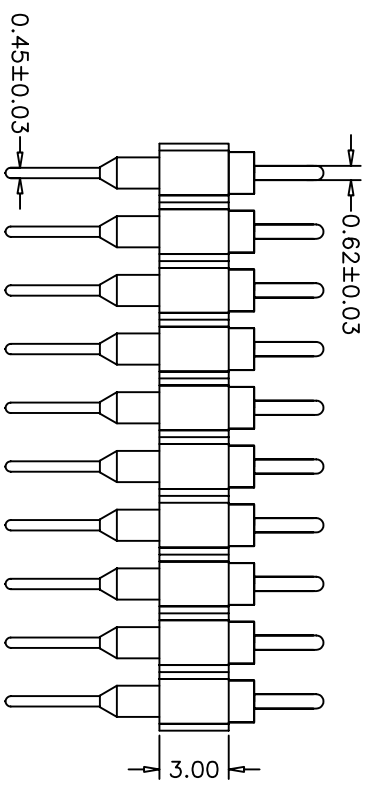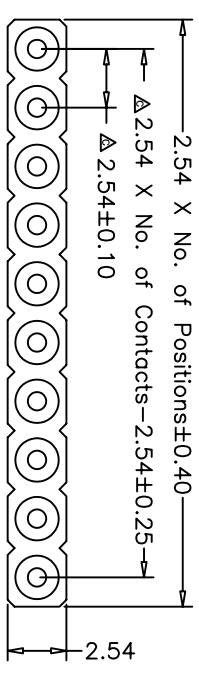

# CNT 肯耐特电子有限公司

TOLERANCE:	PROJECTION	TITLE:
ANGLE $\pm 5^\circ$		2.54mm Pitch SIP Adapters DIP
X.XXX $\pm 0.05$	DATE	Special Pin Length 13.77mm
X.XXX $\pm 0.15$	DRAWN	CY
X.X $\pm 0.20$	CHECKED	PART NO: CNT-1C254-1XX-0S-3/4.08-300
X. $\pm 0.35$	APPROVED	DRAWING NO:
		REV: A
		UNIT: mm
		SCALE: 3:1
		SIZE: A4