
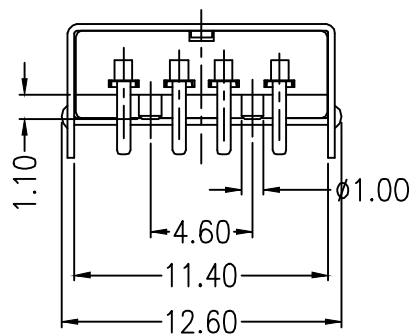
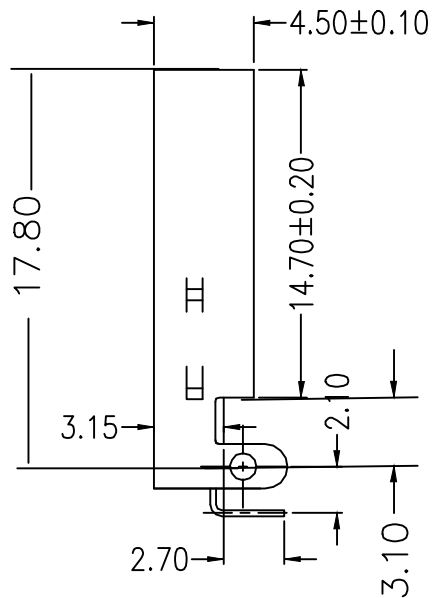
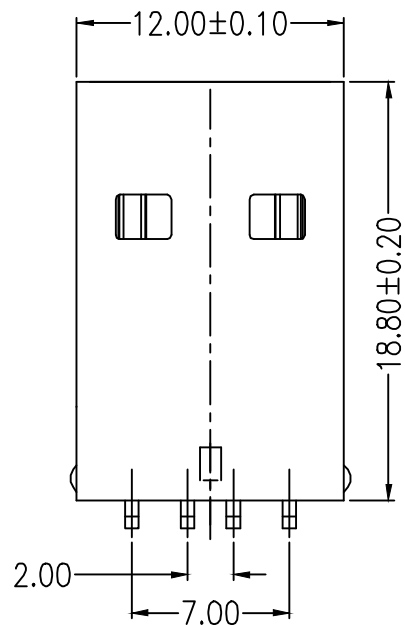



RoHS

REV	DESCRIPTION	DATE



Specification

- 1.Voltage Rating:30V AC
- 2.Current Rating:1.5AMP.
- 3.Insulation Resistance:1000MΩ Min.
- 4.Contact Resistance:30mΩ Max.
- 5.Dielectric Withstanding Voltage:500V AC
- 6.Temperature Range:-20°C to +60°C

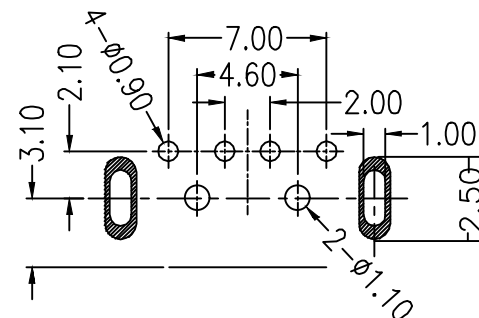

RECOMMENDED P.C.B HOLE LAYOUT

Tolerance:±0.05

3	S-UMXX33	Shell	SPCC	1	T=0.30
2	USB-A1D02M-XX4-X	Housing	PBT	1	
1		Terminal	C2680	4	T=0.25
NO.	P/N	VARIETY	MATERIAL	QT,Y	REMARK

**CNT** 肯耐特电子有限公司

GENERAL TOLERANCE

X.°	±5°	X.	±0.30
.X°	±3°	.X	±0.38
.XX°	±2°	.XX	±0.25
.XXX°	±1°	.XXX	±0.15

DRAWN 董道丽

DATE 20191112

CHECK 王芳芳

DATE 20191112

APPROVE 王元中

DATE 20191112

DWG. NO.

PART. NO.

CNT-USB-AM-TD-1880

TITLE

USB A Plug DIP  
90° Straight 4.6  
Length 18.8

REV. 1.0	UNIT mm	SCALE 1:1	
-------------	------------	--------------	--