

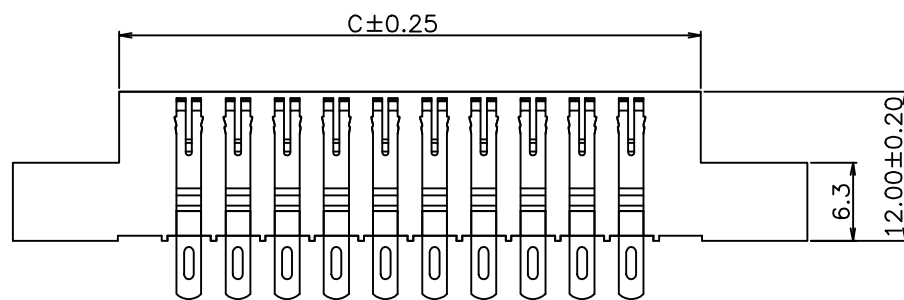


RoHS

REV	DESCRIPTION	DATE

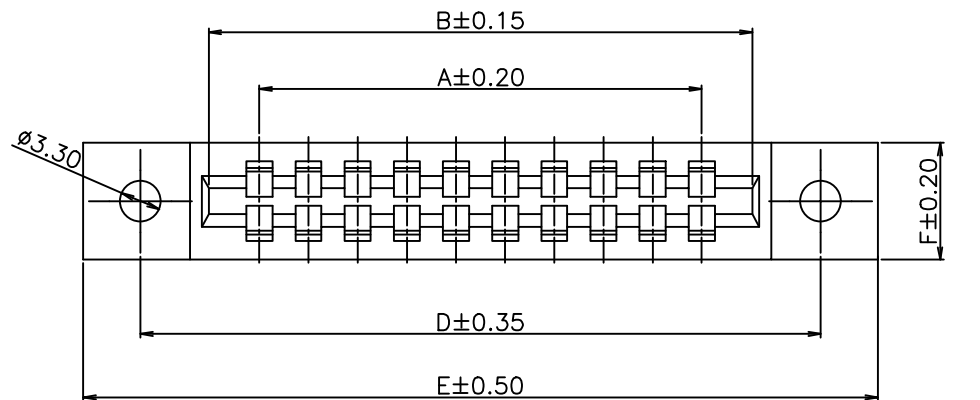

50/100	194.04	202.18	205.24	213.19	222.55	9.40
44/88	170.28	178.42	181.48	189.43	198.79	
40/80	154.44	162.58	165.64	173.59	182.95	
36/72	138.60	146.74	149.80	157.75	167.11	
30/60	114.84	122.98	126.04	133.99	143.35	
26/52	99.00	107.14	110.20	118.15	127.51	
25/50	95.04	103.18	106.24	114.19	123.55	
24/48	91.08	99.22	102.28	110.23	119.59	
22/44	83.16	91.30	94.36	102.31	111.67	
18/36	67.32	75.46	78.52	86.47	95.83	
15/30	55.44	63.58	66.64	74.59	83.95	
12/24	43.56	51.70	54.76	62.71	72.07	
11/22	39.60	47.74	50.80	58.75	68.11	
10/20	35.64	43.78	46.84	54.79	64.15	
08/16	27.72	35.86	38.92	46.87	56.23	
07/14	23.76	31.90	34.96	42.91	52.27	
06/12	19.80	27.94	31.00	38.95	48.31	
Pin No.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F

CNT 肯耐特电子有限公司

GENERAL TOLERANCE

X. ° ±5° X. ±0.30

.X° ±3° .X ±0.38

.XX° ±2° .XX ±0.25

.XXX° ±1° .XXX ±0.15

DRAWN

董道丽

DATE

20200611

DWG. NO.

20200611005

TITLE

SLOT pitch 3.96mm
Connector

CHECK

王芳芳

DATE

20200611

PART. NO.

CNT-S396-2xx-TS-1200

APPROVE

王元中

DATE

20200611

REV.

1.0

UNIT

mm

SCALE

1:1

