

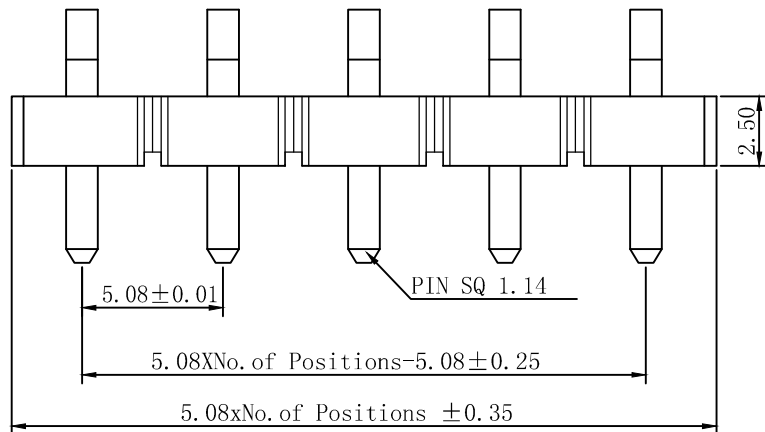


REV	DESCRIPTION	DATE

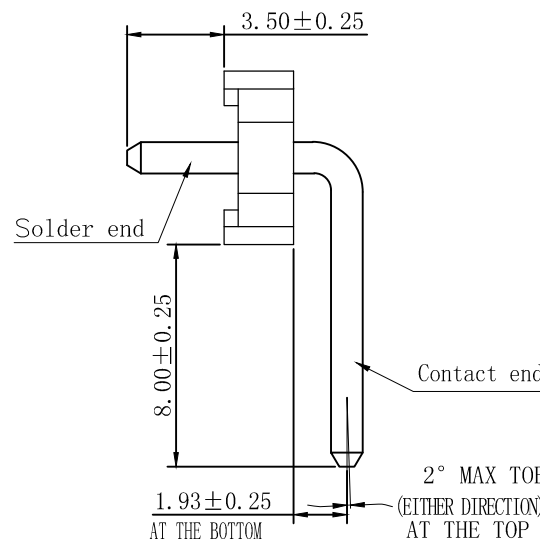


Specifications


Current Rating:7.9Amp  
 Insulation Resistance:1000MΩ Min.  
 Dielectric Withstanding Voltage:1000VAC  
 Contact Resistance:30mΩ Max.  
 Operating Temperature:-40° C to +105° C  
 Materials  
 Contact Material:Brass  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

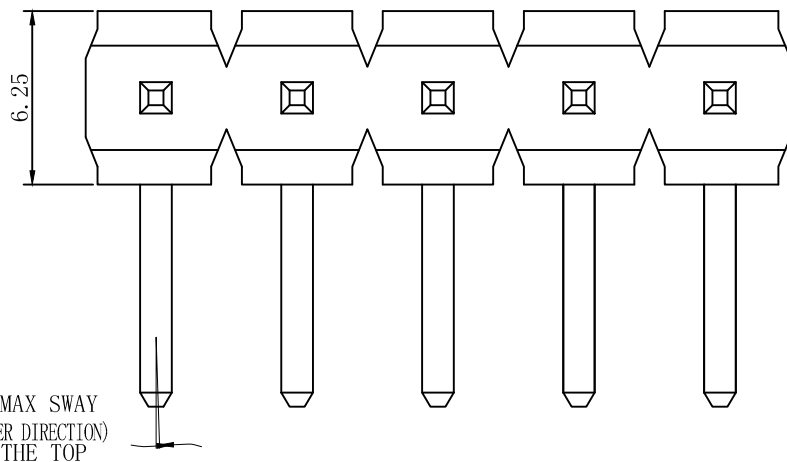

Ordering Information

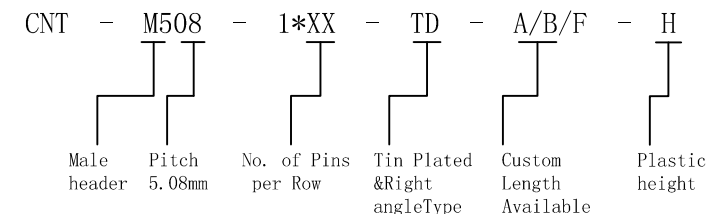

Recommended P. C. Board Layout  
 (Tolerance:±0.05)

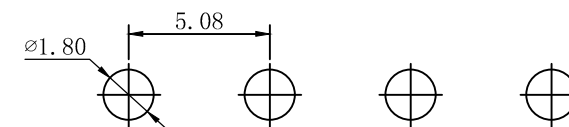

A	3.5	E	
B	8.0	F	1.93
H	2.5	W	

<b>CNT</b> 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	董道丽	DATE	20200518	DWG. NO.	20200518007	TITLE
			X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20200518	PART. NO.		
REV.	UNIT	SCALE			APPROVE	王元中	DATE	20200518	CNT-M508-1*xx-TD-3.5/8/1.93		5.08 PIN HEADER SINGLE ROW R/A TYPE CONNECTOR
1.0	mm	1:1									