
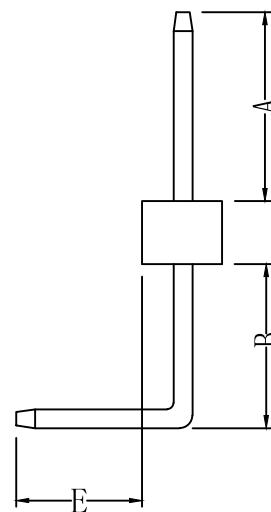
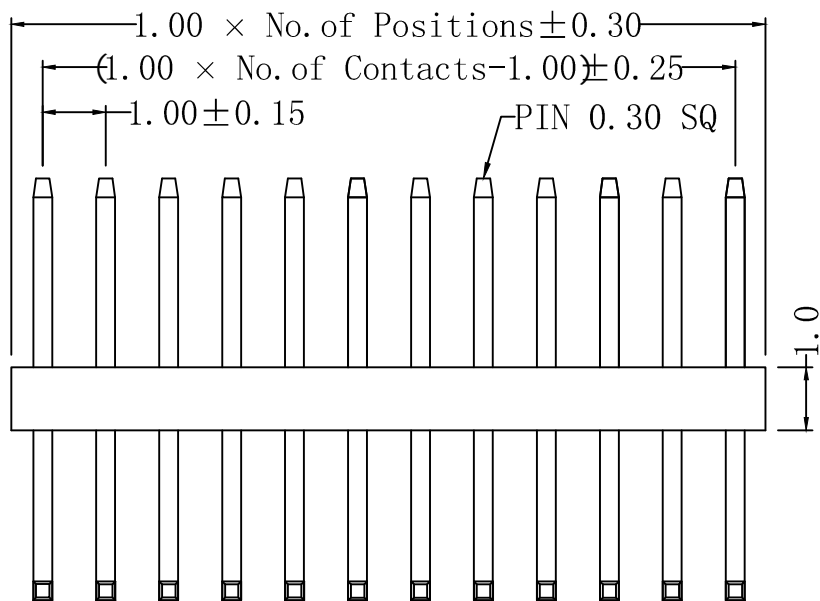


REV	DESCRIPTION	DATE

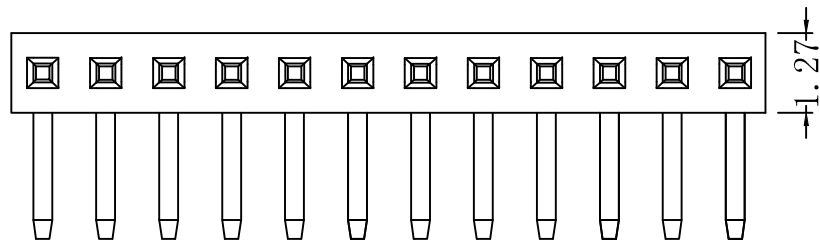


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000 mΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP
 Finish: Gold Plated over nikle
 All materials must meet RoHS requirements

Ordering Information

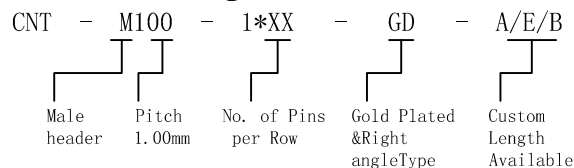

A	E
B	F
H	1.0

Recommended P. C. Board Hole Layout



CNT 肯耐特电子有限公司			GENERAL	TOLERANCE	DRAWN	董道丽	DATE	20190321	DWG. NO.	TITLE		
			X.°	±5°	X.	±0.30	CHECK	王芳芳	DATE		20190321	
REV.	UNIT	SCALE	.X°	±3°	.X	±0.38	APPROVE	王元中	DATE		20190321	PART. NO.
1.0	mm	1:1	.XX°	±2°	.XX	±0.25			CNT-M100-1*xx-GD-A/E/B			
			.XXX°	±1°	.XXX	±0.15						