

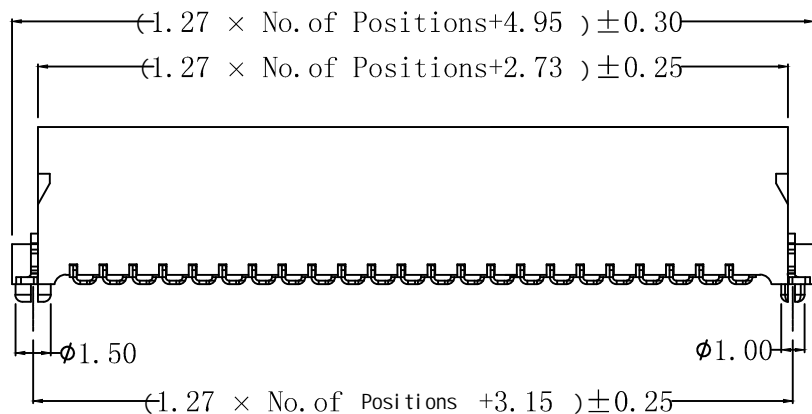


REV	DESCRIPTION	DATE

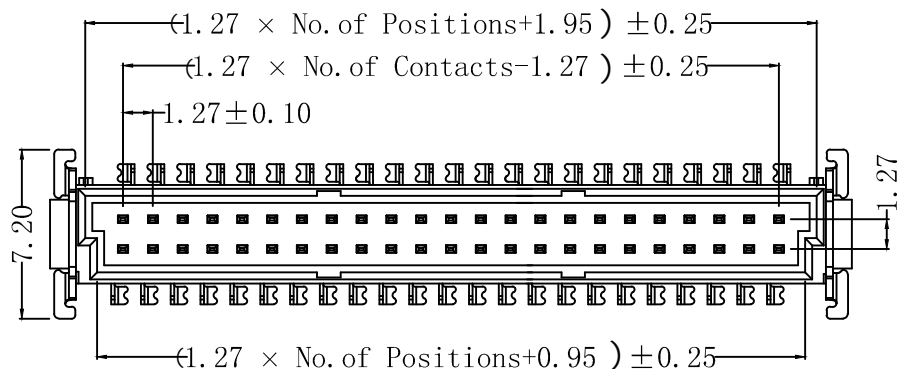

SPECIFICATIONS


Current Rating: 0.8 Amp
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: 500VAC
 Contact Resistance: 30 mΩ Max
 Operating Temperature: -55°C - +125°C

MATERIALS

Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 Colour: Black

All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

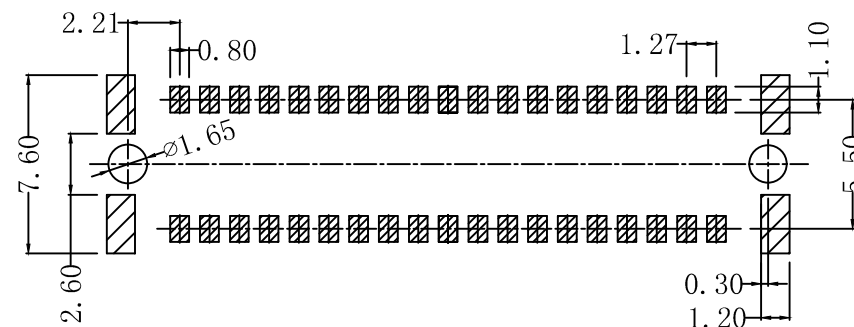

A	E
B	F
H	W

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20190321		
.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.					
.XX° ±2°	.XX ±0.25	王芳芳	20190321						
REV. 1.0	UNIT mm	SCALE 1:1	φ	.XXX° ±1°	.XXX ±0.15	APPROVE	DATE	CNT-M127-2*xx-TM-H	PITCH 1.27 MALE CONNECTOR SMC Q TYPE SMT TYPE 180°
						王元中	20190321		