



REV	DESCRIPTION	DATE

**SPECIFICATIONS**


Current Rating:0.8 Amp  
 Insulator resistance:1000MΩ Min.  
 Dielectric withstanding:500VAC  
 Contact Resistance:30 mΩ Max  
 Operating Temperature:-55°C - +125°C

**MATERIALS**

Contact Material:Copper Alloy  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material  
 Colour:Black  
 All materials must meet RoHS requirements

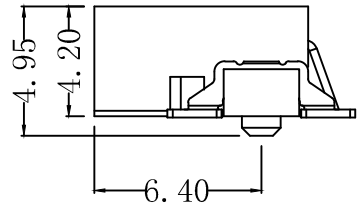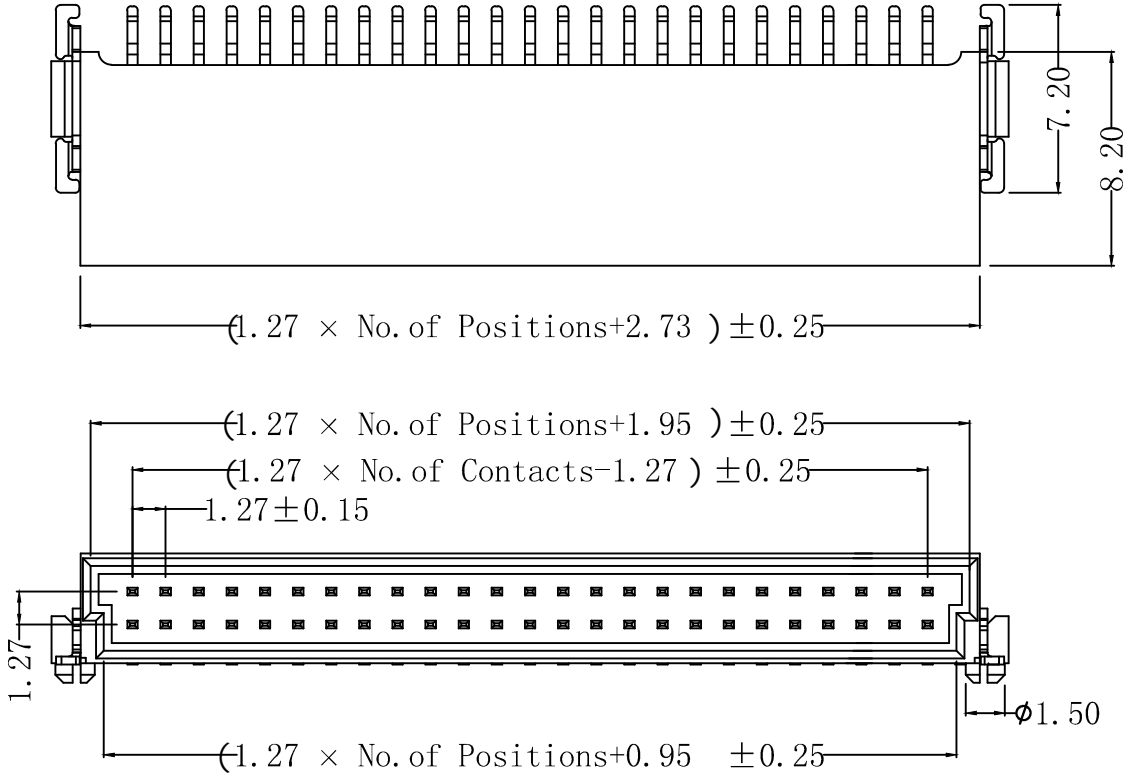

**Recommended P.C. Board Hole Layout**

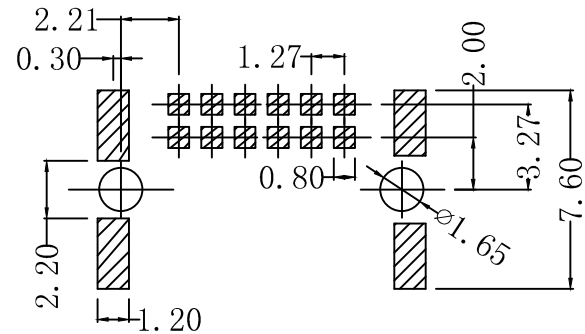

A	E
B	F
H	W

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	董道丽	20190321		
<p>REV. 1.0 UNIT mm SCALE 1:1</p>				.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.	Pitch1.27 male Connector SMC B Type 90° SMT Type
				.XX° ±2° .XX ±0.25	王芳芳	20190321		
				.XXX° ±1° .XXX ±0.15	APPROVE	DATE	CNT-M127-2*xx-GDM-420	
				王元中	20190321			