
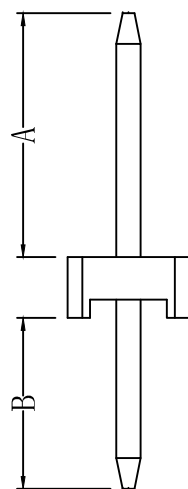
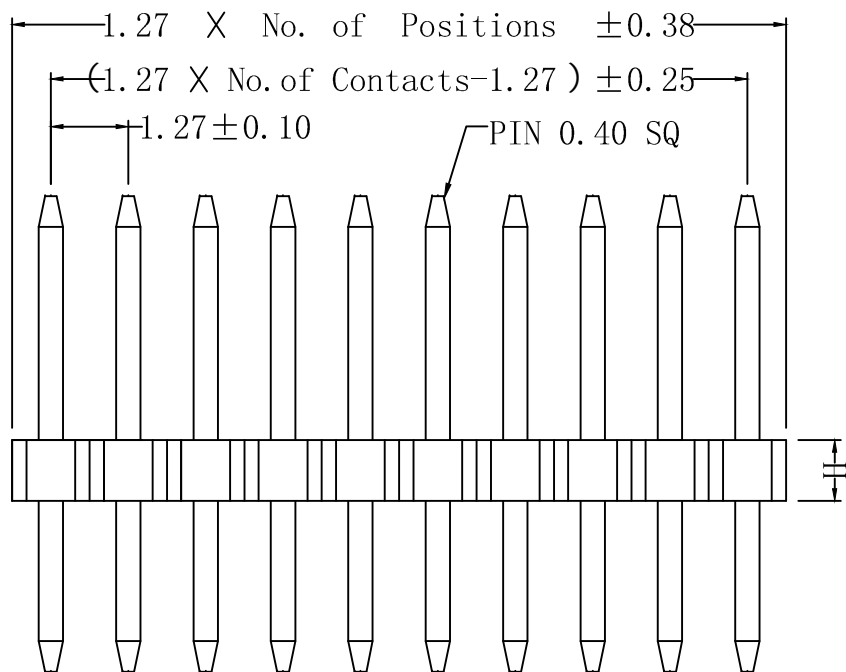


REV	DESCRIPTION	DATE

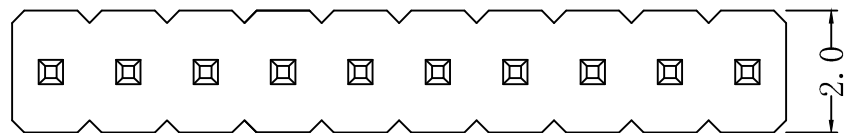

SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C


MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Ordering Information

CNT - M127 - 1*XX - GS - A/B - H
 Male header Pitch 1.27mm No. of Pins per Row Gold Plated & Straight Custom Length Available Plastic height

Recommended P. C. Board Hole Layout



A		E	
B		F	
H	1.0	W	

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE 1.27 Pin Header Single Row Straight Type
			.X° ±5°	.X ±0.30	董道丽	20190321		
REV.	UNIT	SCALE	.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX° ±2°	.XX ±0.25	王芳芳	20190321	CNT-M127-1*xx-GS-A/B-H	
			.XXX° ±1°	.XXX ±0.15	APPROVE	DATE		
					王元中	20190321		