
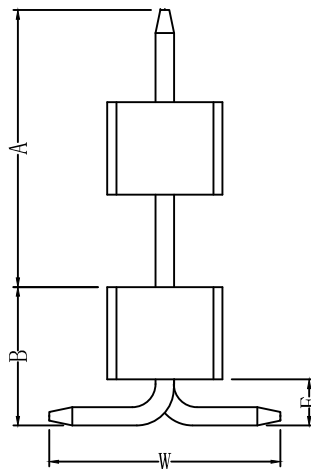
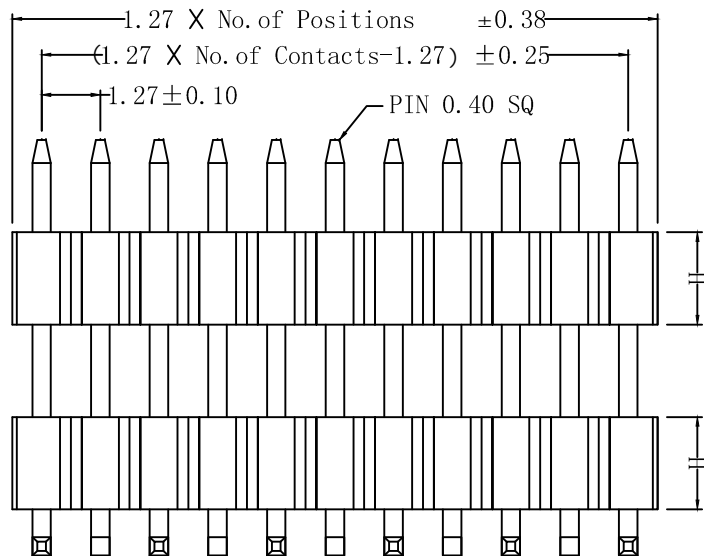


REV	DESCRIPTION	DATE

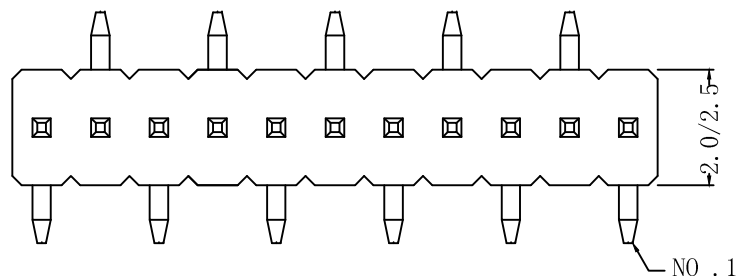


### SPECIFICATIONS

Current Rating: 1.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 300 V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

### Recommended P. C. Board Hole Layout

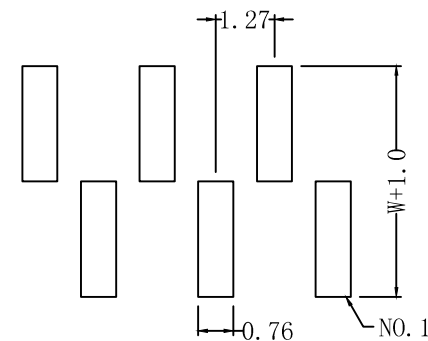

### Ordering Information

CNT - M127 - 1\*XX - GM - A/B/W - H

Male header    Pitch 1.27mm    No. of Pins per Row    Gold Plated &S.M.T    Custom Length Available    Plastic height

A	E
B	F
H	W

<b>CNT</b> 肯耐特电子有限公司			GENERAL	TOLERANCE	DRAWN	董道丽	DATE	20190321	DWG. NO.	TITLE 1.27 Pin Header Single Row SMT Type
			X.°	±5°	X.	±0.30	CHECK	王芳芳	DATE	
REV.	UNIT	SCALE	.X°	±3°	APPROVE	王元中	DATE	20190321	PART. NO.	
1.0	mm	1:1	.XX°	±2°					CNT-M127-1*xx-GM-A/B/W-H	
			.XXX°	±1°						