


REV	DESCRIPTION	DATE

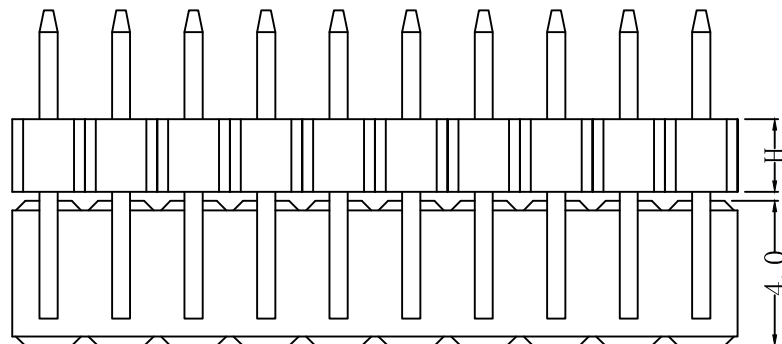



D2 Type

SPECIFICATIONS


Current Rating: 2.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 500V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

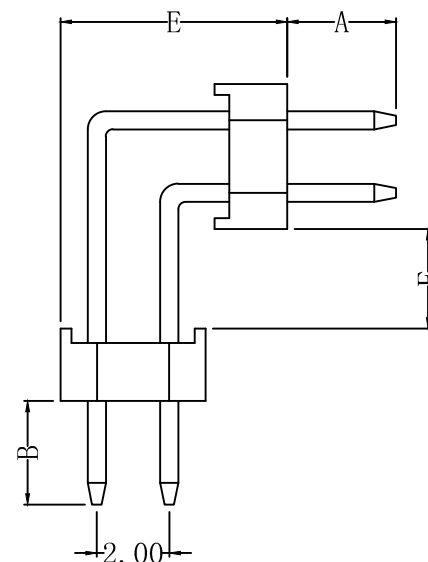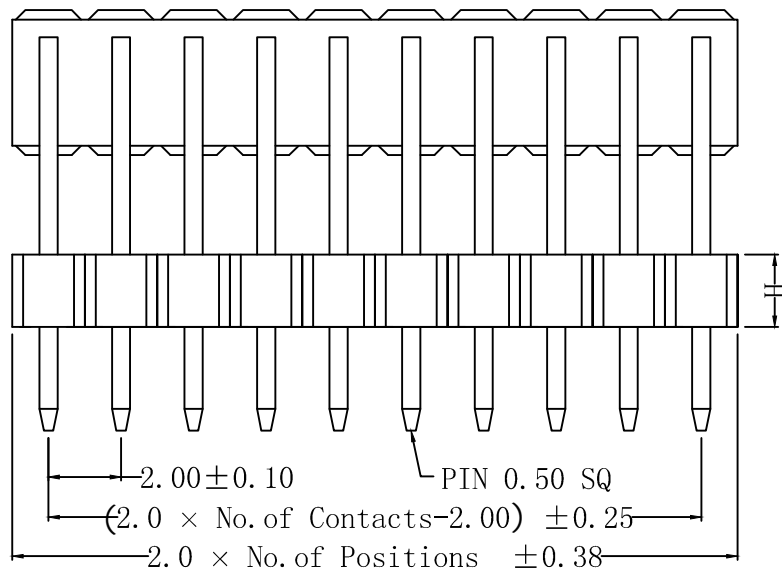

Recommended P. C. Board Hole Layout

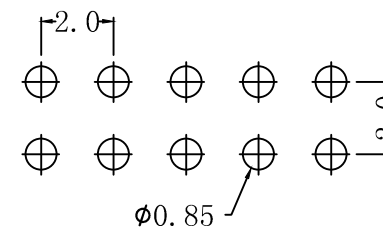

Ordering Information



A	E
B	F
H	W

<b>CNT</b> 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE 2.0mm Pin Header Board Spacer Dual Row Right Angle Type
			X.° ±5°	X. ±0.30	CHECK 王芳芳	DATE 20190321	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1	.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20190321	CNT-M200-2*XX-GD2-A/E/B/F-H	
			.XX° ±2°	.XX ±0.25				
			.XXX° ±1°	.XXX ±0.15				