
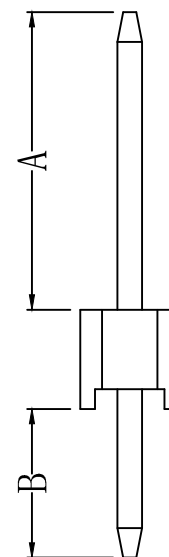
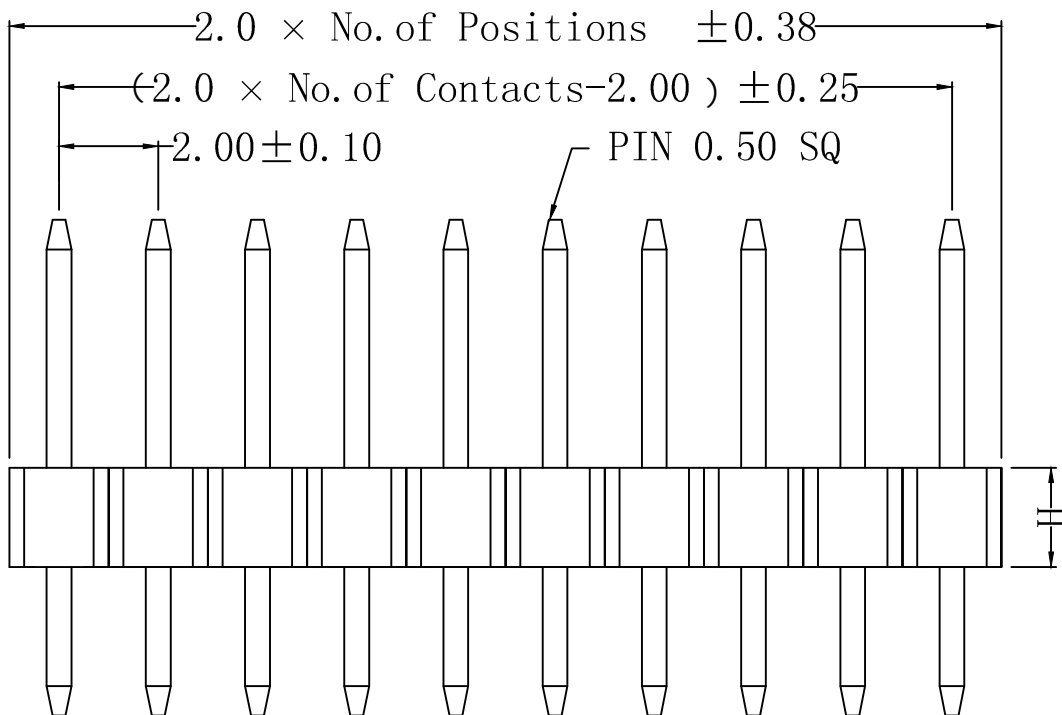


REV	DESCRIPTION	DATE




### SPECIFICATIONS

Current Rating: 2.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 500V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

Recommended P. C. Board  
 Hole Layout

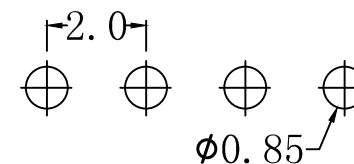

### Ordering Information

CNT - M200 - 1\*XX - GS - A/B - H  
 Male header    Pitch header 2.00mm    No. of Pins per Row    Gold Plated & Straight    Custom Length Available    Plastic height

A	E
B	F
H	W

<b>CNT</b> 肯耐特电子有限公司		GENERAL	TOLERANCE	DRAWN	董道丽	DATE	20190321	DWG. NO.	TITLE 2.0mm Pin Header Single Row Straight Type
		.X°	±5°	.X	±0.30	CHECK	王芳芳	DATE	
REV.	UNIT	SCALE	APPROVE		王元中	DATE	20190321	PART. NO.	
1.0	mm	1:1	.XX°	±2°	.XX	±0.25			
			.XXX°	±1°	.XXX	±0.15			