
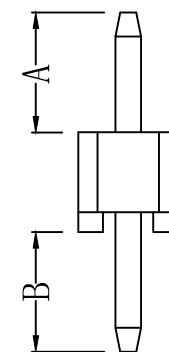
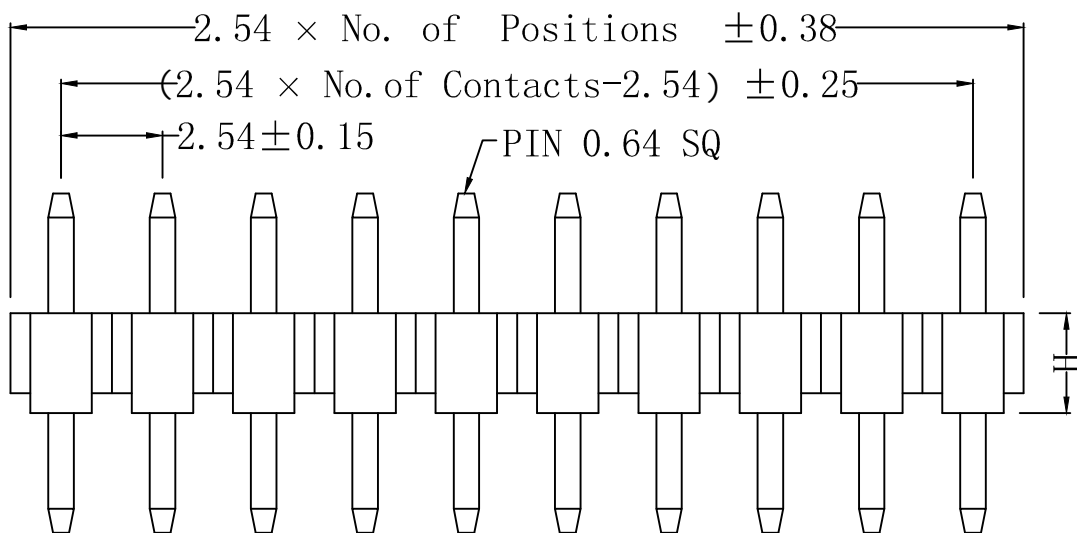


REV	DESCRIPTION	DATE




SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C


MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Ordering Information

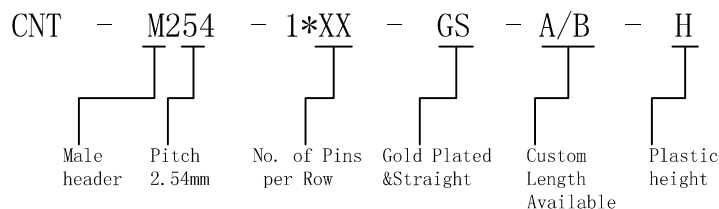

Recommended P. C. Board Hole Layout

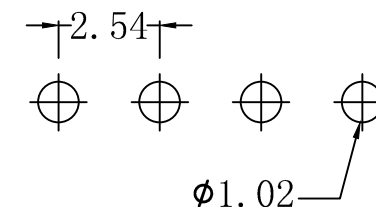

A		E	
B		F	
H	H	W	

CNT 肯耐特电子有限公司				GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE	
				.X°	±5°	.X	±0.30	董道丽		20190321
REV. 1.0 UNIT mm SCALE 1:1				.X°	±3°	.X	±0.38	CHECK	DATE	PART. NO. CNT-M254-1*xx-GS-A/B-H
				.XX°	±2°	.XX	±0.25	王芳芳	20190321	
				.XXX°	±1°	.XXX	±0.15	APPROVE	DATE	2.54mm Pin Header Single Row Straight Type
								王元中	20190321	