
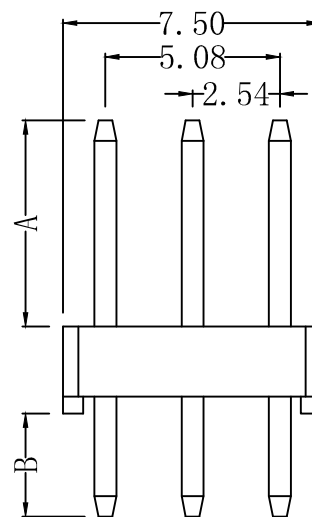
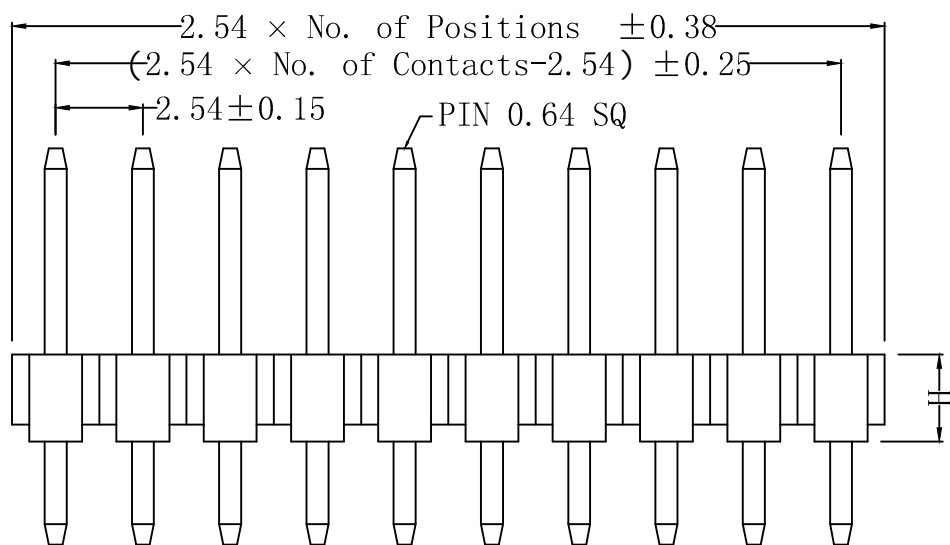


REV	DESCRIPTION	DATE

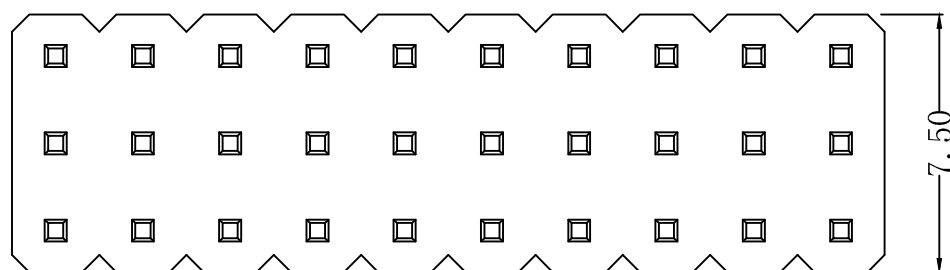


### SPECIFICATIONS

Current Rating: 3.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 600V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C


### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

### Recommended P.C. Board Hole Layout

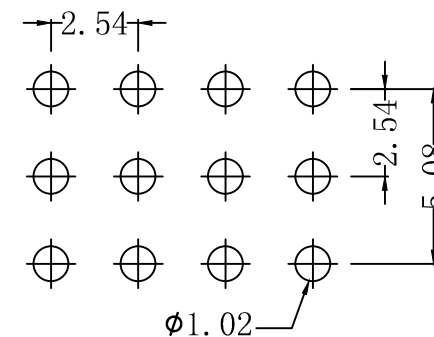

### Ordering Information

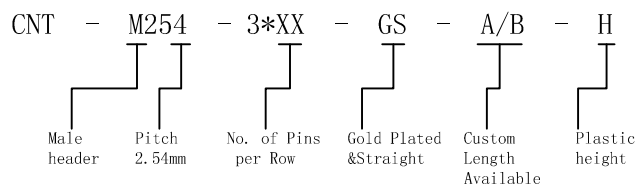

A		E	
B		F	
H	2.54	W	

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X.° ±5°    X. ±0.30	董道丽	20190321		2.54mm Pin Header Triple Row Straight Type
			.X° ±3°    .X ±0.38	王芳芳	20190321	PART. NO.	
			.XX° ±2°    .XX ±0.25	王元中	20190321	CNT-M254-3*XX-GS-A/B-H	
			.XXX° ±1°    .XXX ±0.15				