
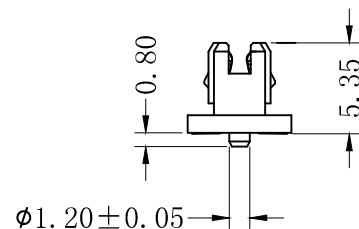
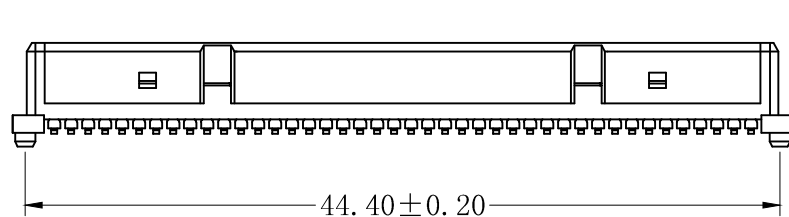


REV	DESCRIPTION	DATE

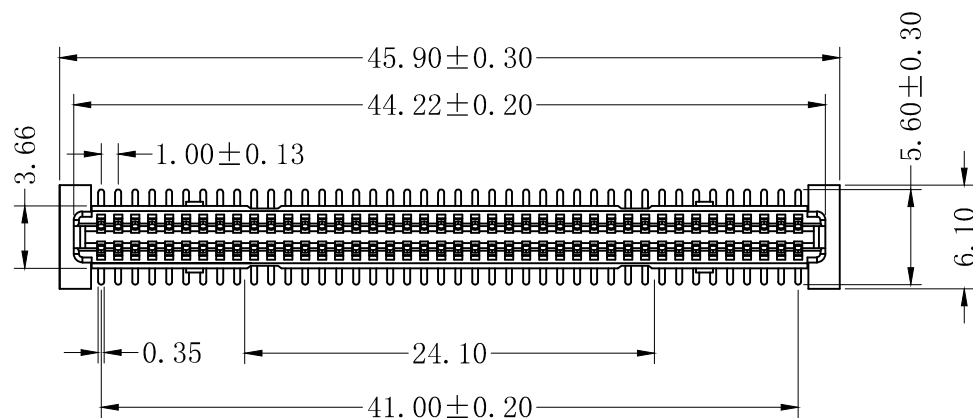


Specifications

Current Rating: 0.5Amp  
 Insulation Resistance: 500M $\Omega$  Min.  
 Dielectric Withstanding: 200V AC  
 Contact Resistance: 30m $\Omega$  Max.  
 Operating Temperature: -40° C to +105° C

Materials

Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P. C. Board Hole Layout

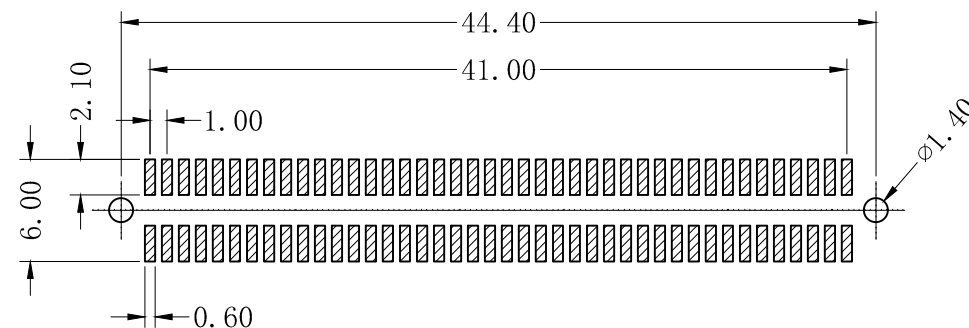

A		E	
B		F	
H	5.35	W	

<p><b>CNT</b> 肯耐特电子有限公司</p>			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE	.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX° ±2°	.XX ±0.25	王芳芳	20190321		
			.XXX° ±1°	.XXX ±0.15	王元中	20190321	CNT-F100-2*XX-GM-535/5.6-P	

1.0mm PITCH BOARD TO BOARD FEMALE S. M. T TYPE