

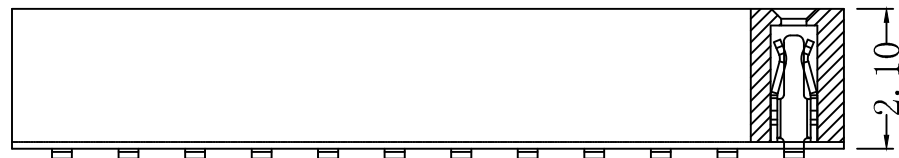


REV	DESCRIPTION	DATE

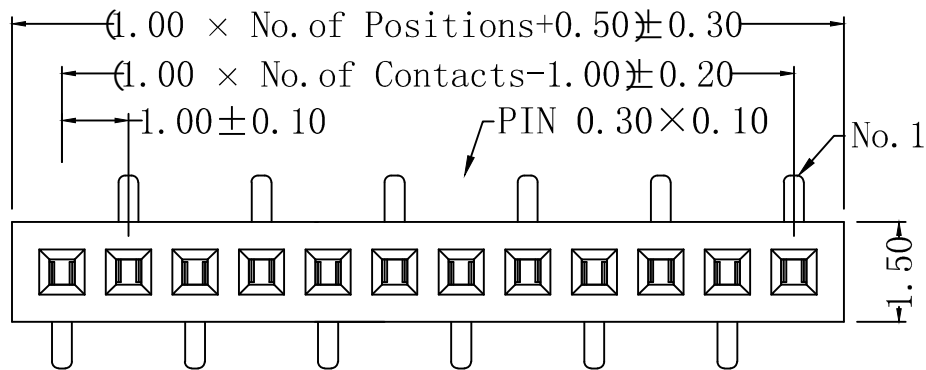


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000 mΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP
 Finish: Gold Plated over nikle
 All materials must meet RoHS requirements

Recommended P.C. Board Hole Layout

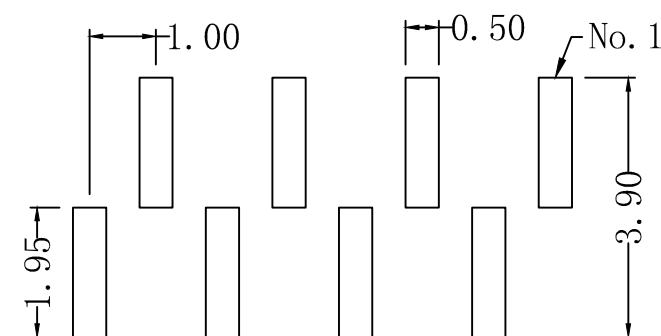

Ordering Information

CNT - F100 - 1*XX - GM1 - 210

Female header Pitch 1.00mm No. of Pins per Row Gold Plated & S. M. T Custom Length Available

A		E	
B		F	
H	2.1	W	

CNT 肯耐特电子有限公司				GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE	
				X.°	±5°	X.	±0.30	董道丽		20190415
REV.	UNIT	SCALE		.X°	±3°	.X	±0.38	CHECK		DATE
1.0	mm	1:1		.XX°	±2°	.XX	±0.25	王芳芳	20190415	
				.XXX°	±1°	.XXX	±0.15	王元中	20190415	CNT-F100-1*XX-GM1-210

1.00 Female Header Single Row SMT Type Connector