

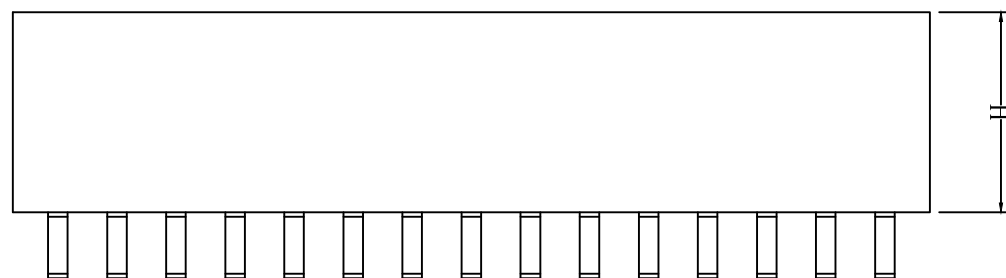


REV	DESCRIPTION	DATE

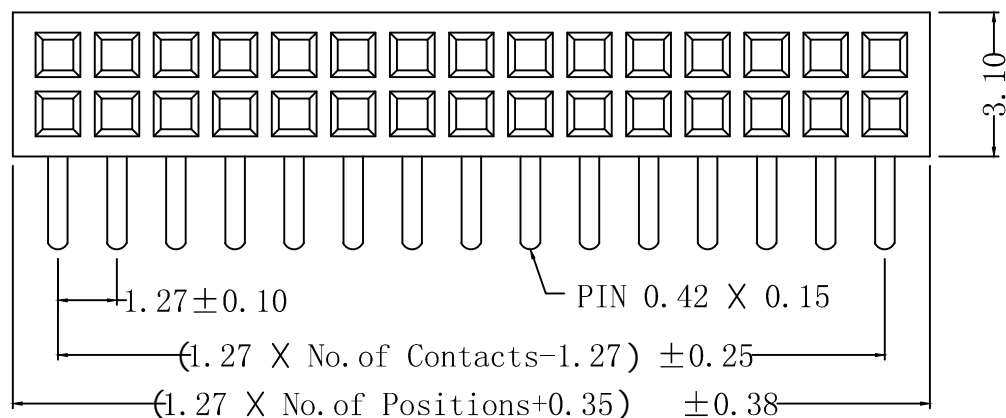


### SPECIFICATIONS

Current Rating: 1.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 300 V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements


Recommended P. C. Board Hole Layout



### Ordering Information

CNT - F127 - 2\*XX - GD - H - B

A	E
B	F
H	W

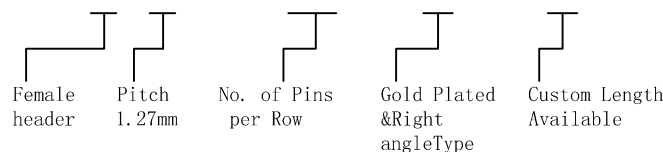

<b>CNT</b> 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV. 1.0			.X° ±3°		CHECK	DATE	PART. NO.	1.27*1.27 Female Header Dual Row Right Angle
			.X ±0.38	.X ±0.25	王芳芳	20190321		
UNIT mm			SCALE 1:1		APPROVE	DATE	CNT-F127-2*XX-GD-H/B	
mm			1:1		王元中	20190321		