
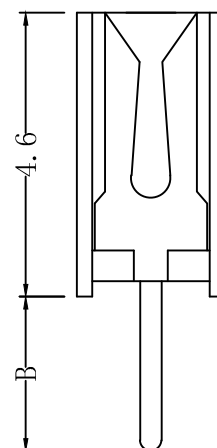
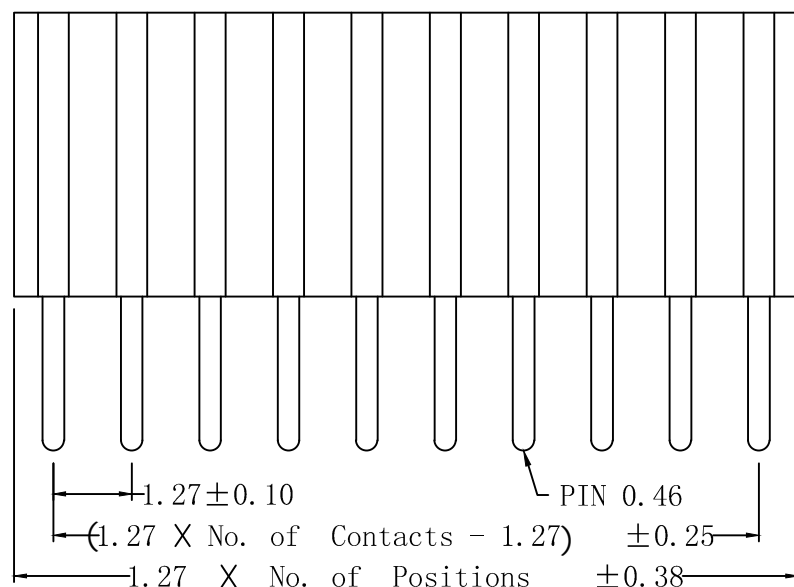


REV	DESCRIPTION	DATE

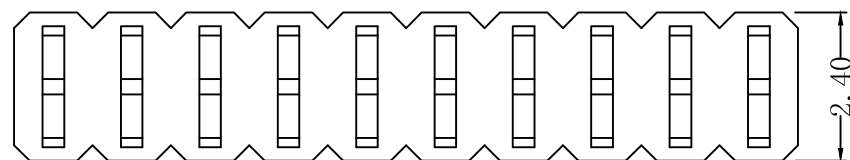

SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Ordering Information

CNT - F127*2.54 - 1*XX - GS - H - B

Female header Pitch 1.27*2.54mm No. of Pins per Row Gold Plated & Straight Custom Length Available

Recommended P. C. Board Hole Layout



A		E	
B		F	
H	4.6	W	

CNT 肯耐特电子有限公司

GENERAL TOLERANCE				DRAWN	DATE	DWG. NO.	TITLE
REV.	UNIT	SCALE		董道丽	20190321		1.27 Female Header Single Row Straight Type
1.0	mm	1:1		王芳芳	20190321	PART. NO.	
				王元中	20190321	CNT-F127*2.54-1*XX-GS-460/B	