
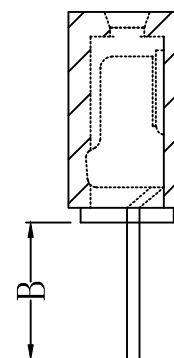
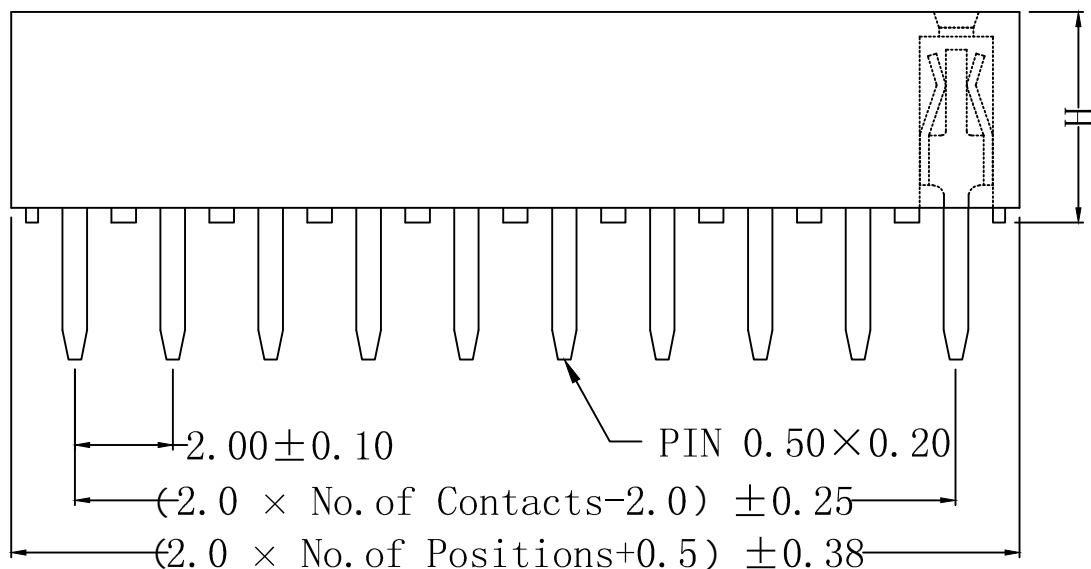


REV	DESCRIPTION	DATE

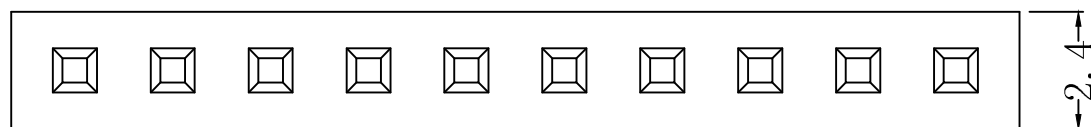

SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C


MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickel
 All materials must meet RoHS requirements


Ordering Information

CNT - F200 - 1*XX - GS - H - B

A	E
B	F
H	4.30

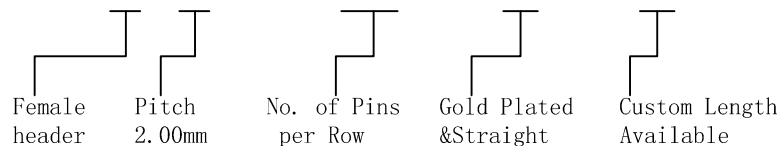

Recommended P. C. Board Hole Layout

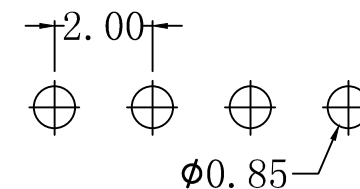

CNT 肯耐特电子有限公司		GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
		X.° ±5°	X. ±0.30	董道丽	20190321		
REV. 1.0		SCALE 1:1		CHECK	DATE	PART. NO.	2.00mm Female Header Single Row Straight Type
		UNIT mm		.X° ±3°	.X ±0.38	王芳芳	
		SYMBOL		APPROVE	DATE	CNT-F200-1*xx-GS-H/B	
				王元中	20190321		