


REV	DESCRIPTION	DATE

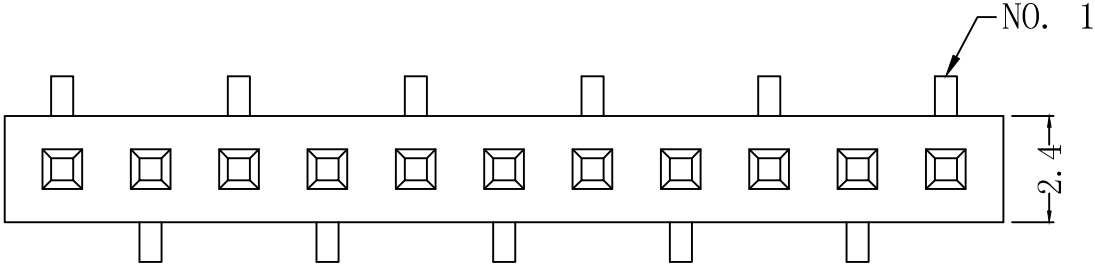



Type 1

SPECIFICATIONS


Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

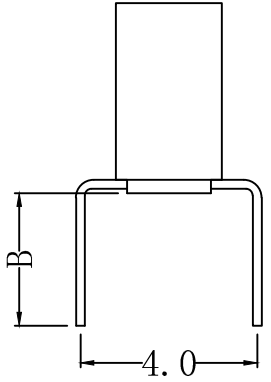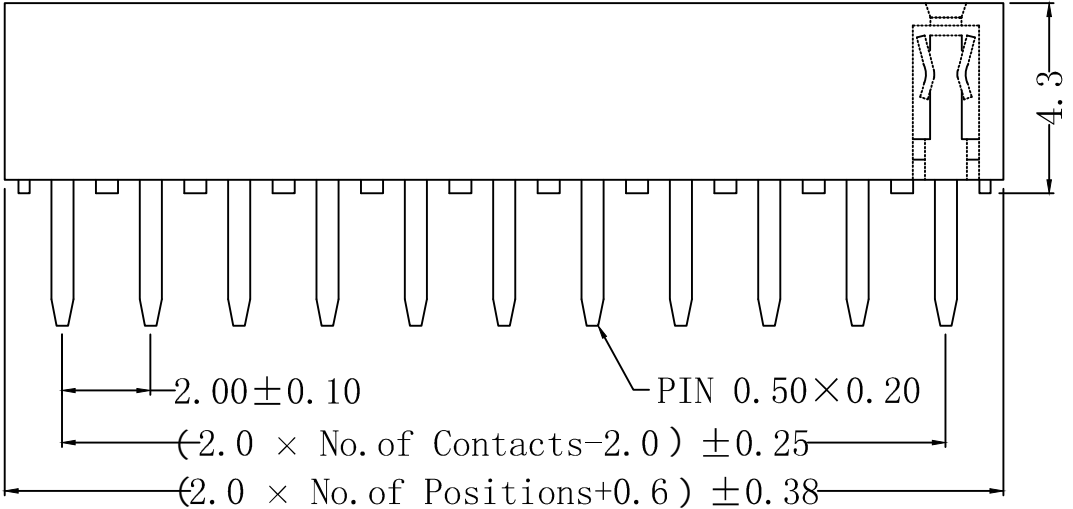

Recommended P.C. Board Hole Layout

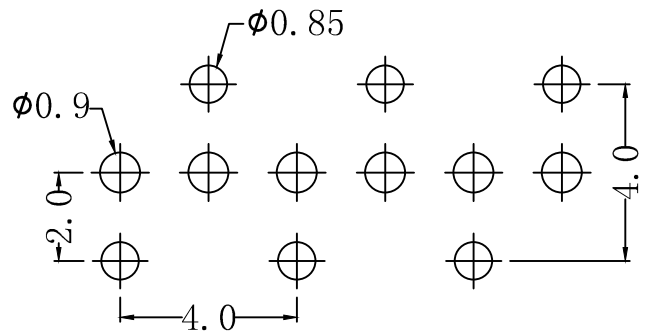

Ordering Information

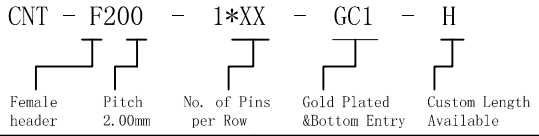

A		E	
B		F	
H	4.3	W	

<p>CNT 肯耐特电子有限公司</p>			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE	.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX° ±2°	.XX ±0.25	王芳芳	20190321		
			.XXX° ±1°	.XXX ±0.15	APPROVE	DATE	CNT-F200-1*XX-GC1-430	
					王元中	20190321		2.00mm Female Header Single Row Bottom Entry Type