
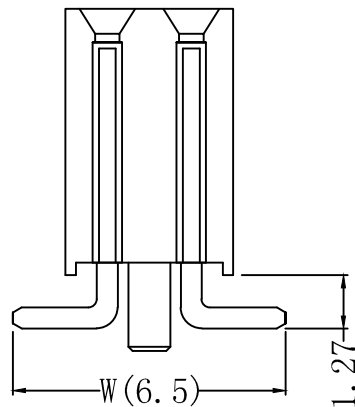
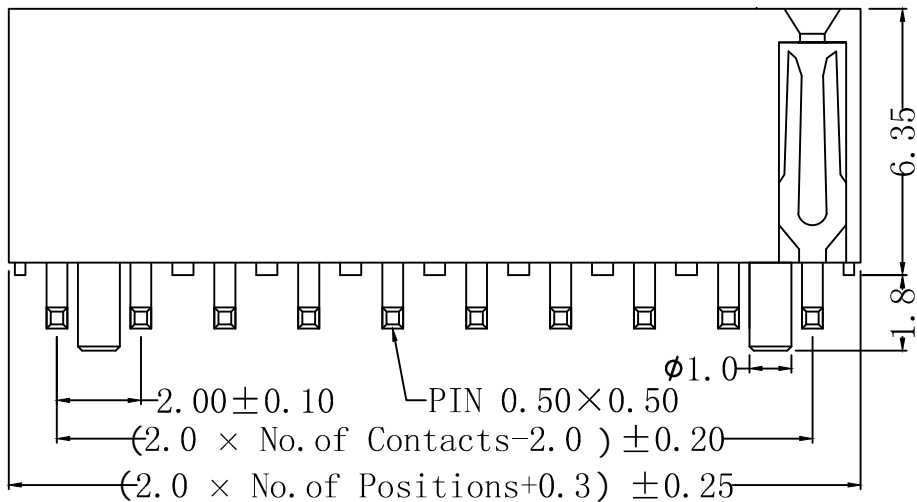


| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| | | |
| | | |

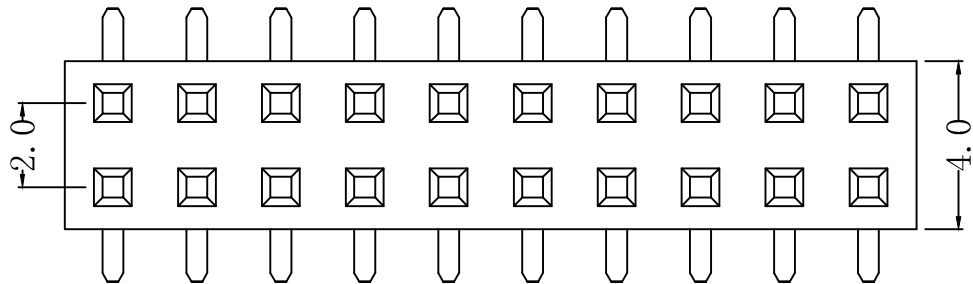


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

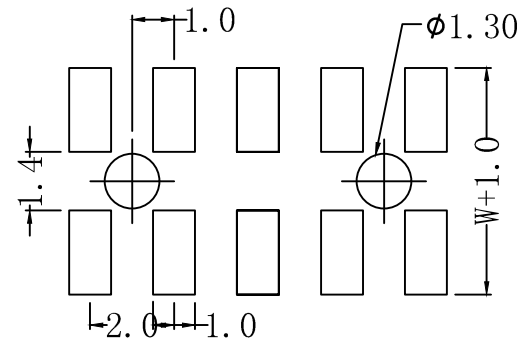

Ordering Information

CNT - F200 - 2*XX - GM - H/W - P

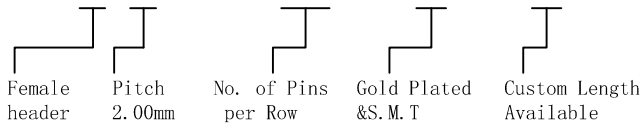

| | |
|---|---|
| A | E |
| B | F |
| H | W |

CNT 肯耐特电子有限公司

| | | | |
|-------------|------------|--------------|--|
| REV. 1.0 | UNIT mm | SCALE 1:1 | |
|-------------|------------|--------------|--|

| GENERAL | TOLERANCE |
|-----------|------------|
| .X° ±5° | .X ±0.30 |
| .X° ±3° | .X ±0.38 |
| .XX° ±2° | .XX ±0.25 |
| .XXX° ±1° | .XXX ±0.15 |

| | | | |
|---------|-----|------|----------|
| DRAWN | 董道丽 | DATE | 20190321 |
| CHECK | 王芳芳 | DATE | 20190321 |
| APPROVE | 王元中 | DATE | 20190321 |

| | |
|-----------|-------------------------|
| DWG. NO. | |
| PART. NO. | CNT-F200-2XX-GM-635/W-P |

| | |
|-------|--|
| TITLE | 2.00mm Female Header Dual Row With Post SMT Type |
|-------|--|