
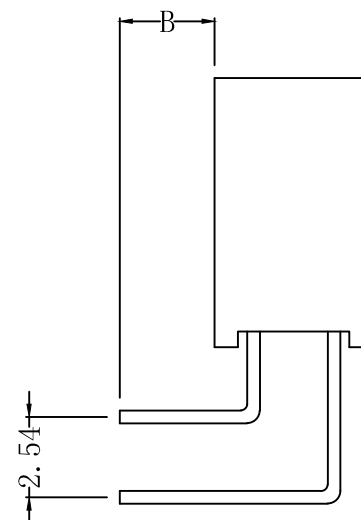
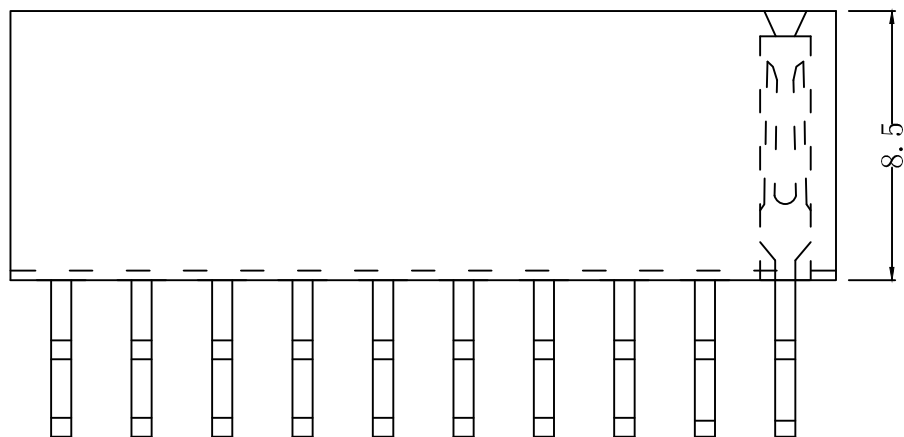


REV	DESCRIPTION	DATE

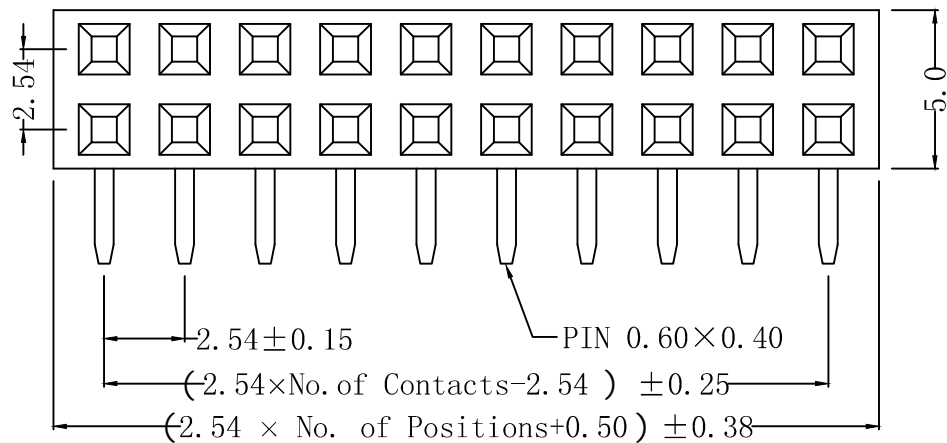


SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: Thermoplastic, UL 94V-0 PBT
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board
 Hole Layout

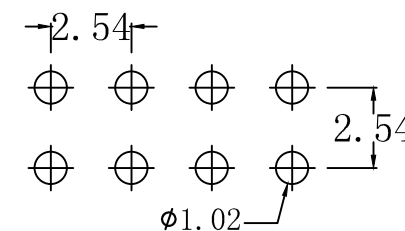

Ordering Information

CNT - F254 - 2*XX - GD - H - B/E - Y

Female header Pitch 2.54mm No. of Pins per Row Gold Plated & Right angleType Custom Length Available

A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X.° ±5° .X° ±3° .XX° ±2° .XXX° ±1°	董道丽	20190321		2.54*2.54 Female Header Dual Row Right Angle
			X. ±0.30 .X ±0.38 .XX ±0.25 .XXX ±0.15	王芳芳	20190321	PART. NO.	
				王元中	20190321	CNT-F254-2*xx-GD-H/B/E-Y	