
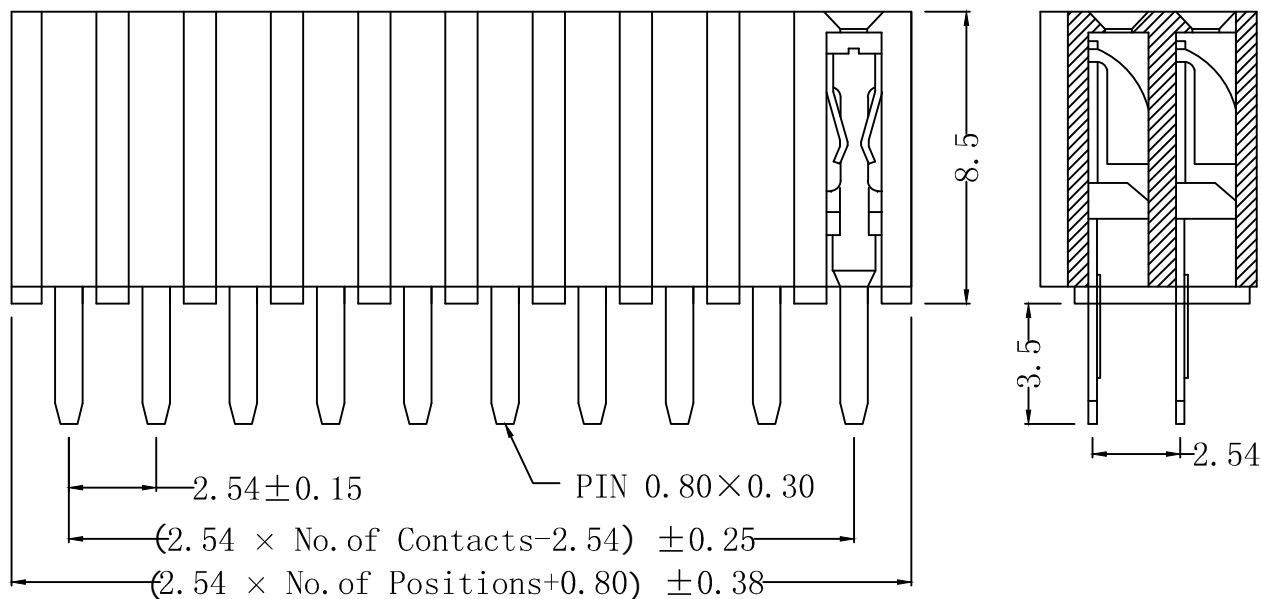


REV	DESCRIPTION	DATE

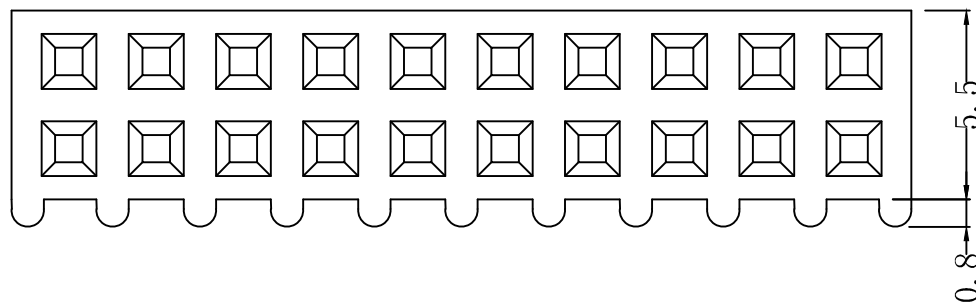


### SPECIFICATIONS

Current Rating: 3.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 600V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS


Contact Material: Copper Alloy  
 Insulator Material: Thermoplastic, UL 94V-0 PBT  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

### Recommended P. C. Board Hole Layout

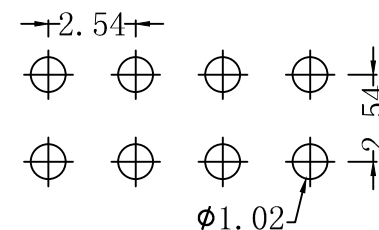

### Ordering Information

CNT - F254 - 2\*XX - GS - 8.5/3.5 - 0



A		E	
B		F	
H	8.5	W	

<b>CNT</b> 肯耐特电子有限公司				GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE	
				X.°	±5°	X.	±0.30	董道丽		20190327
REV.	UNIT	SCALE		.X°	±3°	.X	±0.38	CHECK		DATE
1.0	mm	1:1		.XX°	±2°	.XX	±0.25	王芳芳	20190327	
				.XXX°	±1°	.XXX	±0.15	王元中	20190327	CNT-F254-2*XX-GS-8.5/3.5-0

2.54\*2.54 Female Header  
 Dual Row Straight Type