


REV	DESCRIPTION	DATE

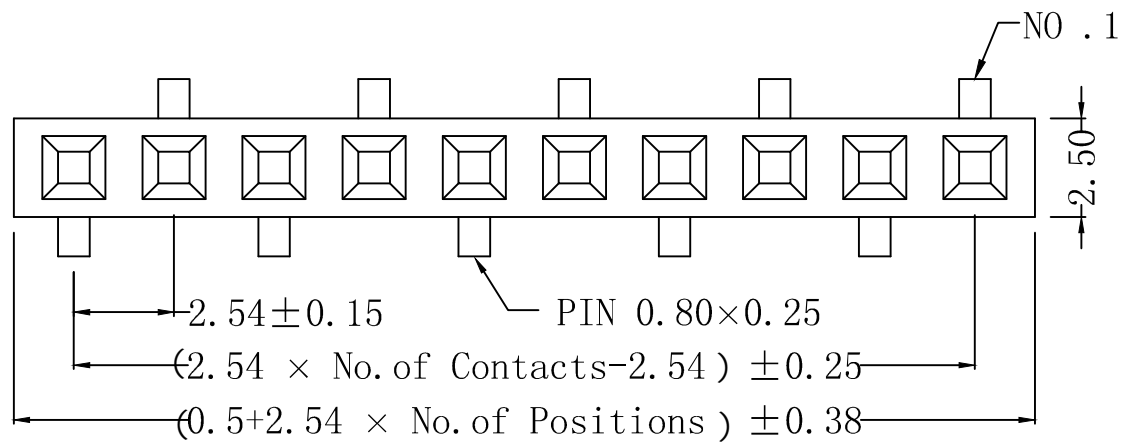



Type 1

SPECIFICATIONS


Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

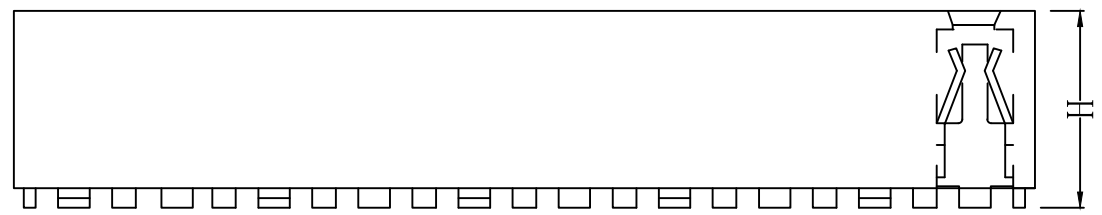

Recommended P. C. Board Hole Layout

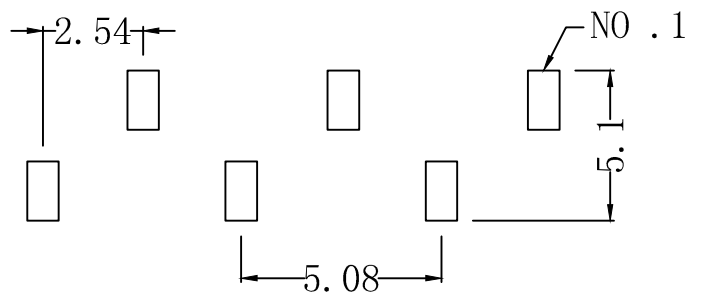

Ordering Information

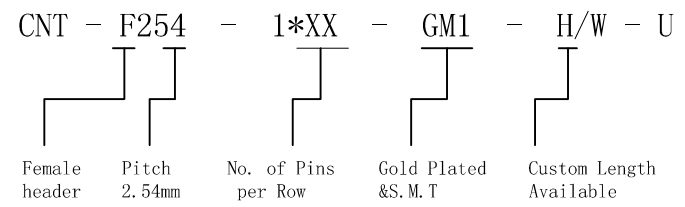

A	E
B	F
H	W

CNT 肯耐特电子有限公司				GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	董道丽	20190321		
.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.					
REV. 1.0	UNIT mm	SCALE 1:1	APPROVE	.XX° ±2° .XX ±0.25	王芳芳	20190321	CNT-F254-1*xx-GM1-H/4.1-U	2.54mm Female Header Single Row SMT
				.XXX° ±1° .XXX ±0.15	王元中	20190321		