


REV	DESCRIPTION	DATE

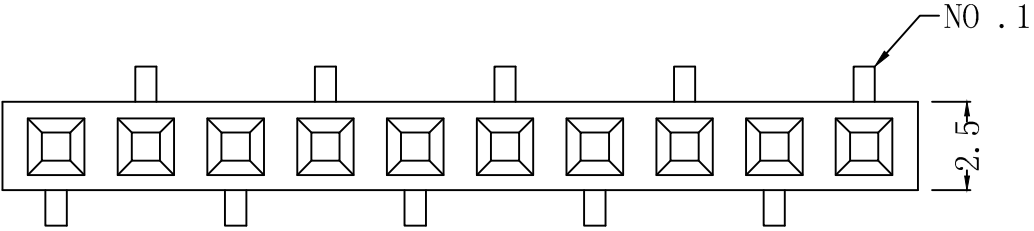



Type 1

SPECIFICATIONS


Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

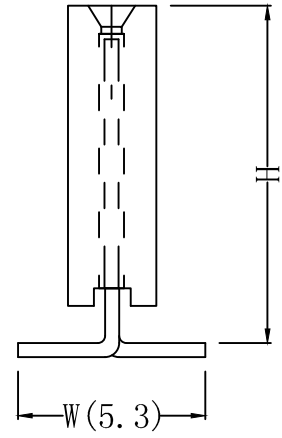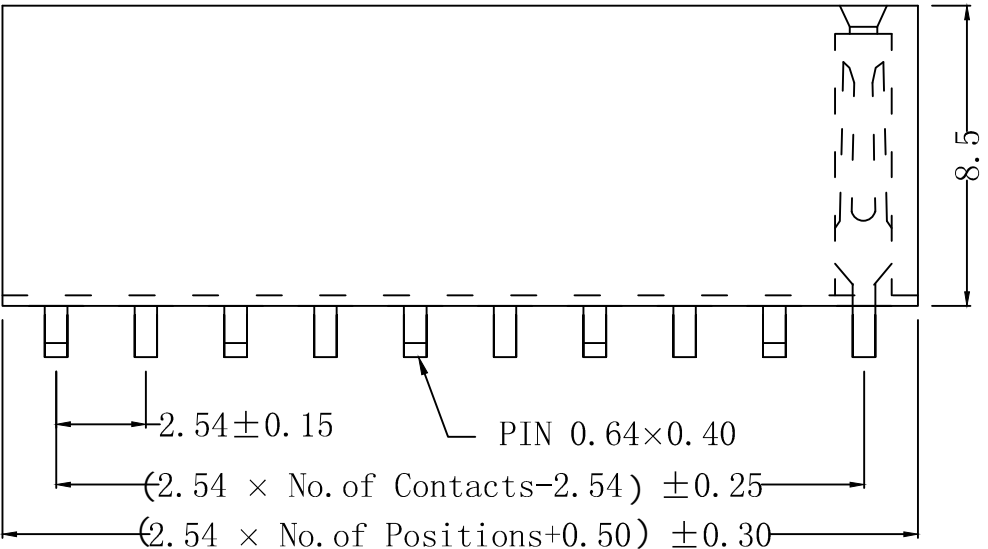

Recommended P. C. Board Hole Layout

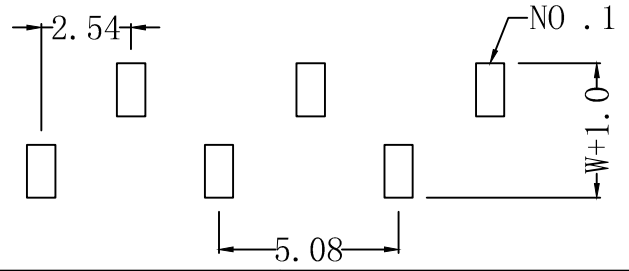

Ordering Information

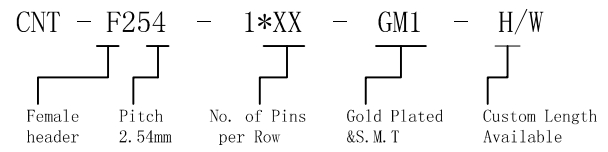

A	E
B	F
H	W

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽		DATE 20190321		DWG. NO.		TITLE	
				X.° ±5°		X. ±0.30		CHECK 王芳芳		DATE 20190321		PART. NO.	
.X° ±3°		.X ±0.38		APPROVE 王元中		DATE 20190321		CNT-F254-1*XX-GM1-850/W					
.XX° ±2°		.XX ±0.25											
.XXX° ±1°		.XXX ±0.15											
REV. 1.0	UNIT mm	SCALE 1:1	⊕										