
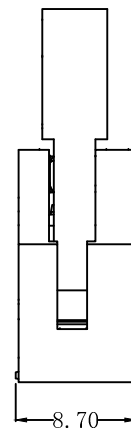
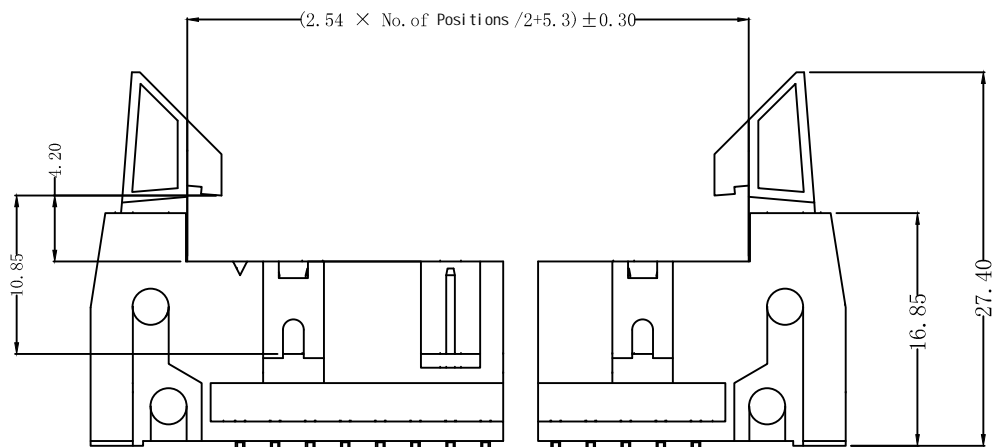


REV	DESCRIPTION	DATE

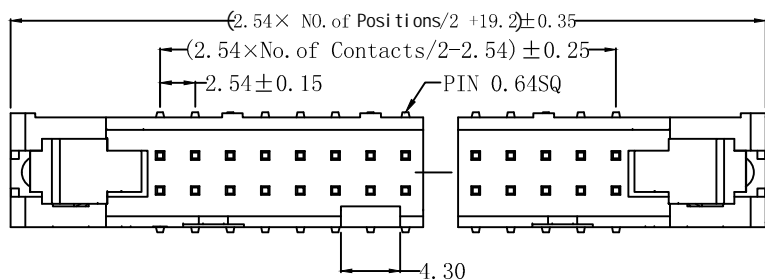

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding Voltage: 500VAC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40° C to +105° C


Materials

Contact Material: Brass

Insulator Material: Thermoplastic, UL 94V-0 PBT or the equivalent material


All materials must meet Greenconn requirement for environment protection.

Recommended P. C. Board
Layout
(Tolerance: ±0.05)



Ordering Information

CNT - G254 - 2*XX - GM

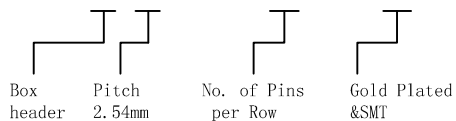

A		E	
B		F	
H		W	

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	董道丽	20210128	20210128001	
REV.	UNIT	SCALE		CHECK	DATE	PART. NO.	2.54 PITCH 勾勾牛角(短耳)	
1.0	mm	1:1		王芳芳	20210128	CNT-G254-2*XX-GM		
				APPROVE	DATE			
				.XX° ±2° .XX ±0.25	王元中	20210128		
				.XXX° ±1° .XXX ±0.15				