

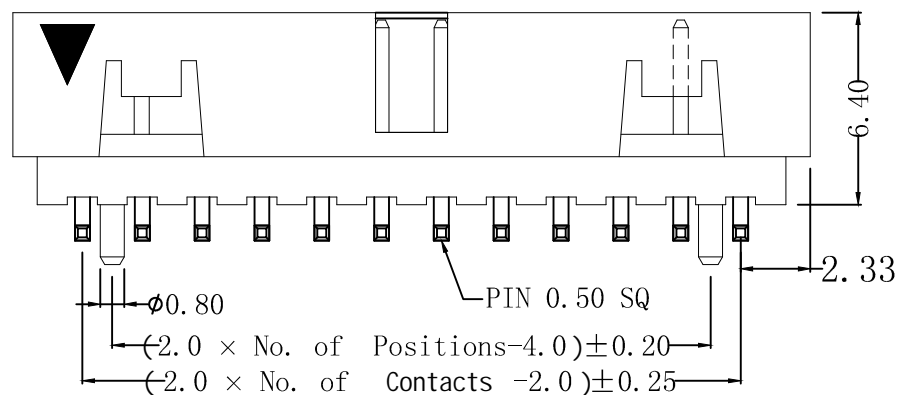


REV	DESCRIPTION	DATE

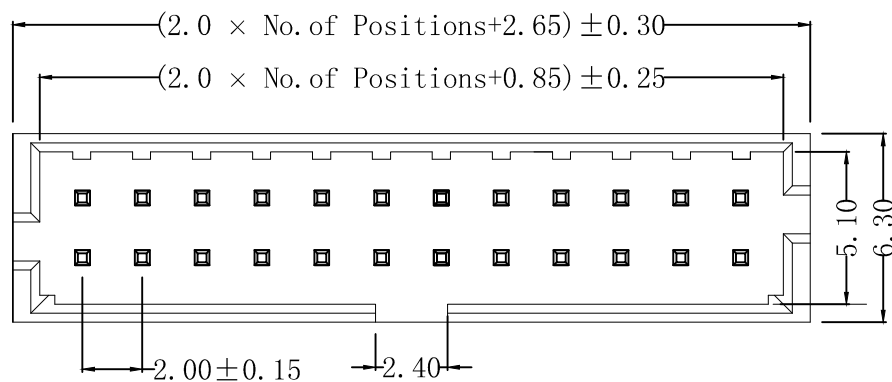


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

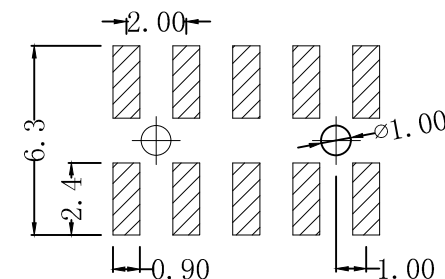

Ordering Information

CNT - B200 - 2*XX - GM - H/W - P - TR

A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE	DRAWN		CHECK	DATE	PART. NO.	
1.0	mm	1:1	X.° ±3°		王芳芳	20190321		
			.XX° ±2°		APPROVE	DATE		
			.XXX° ±1°	.XXX ±0.15	王元中	20190321	CNT-B200-2*xx-GM-640/5.3-P	
								2.0mm Box Header SMT Type