
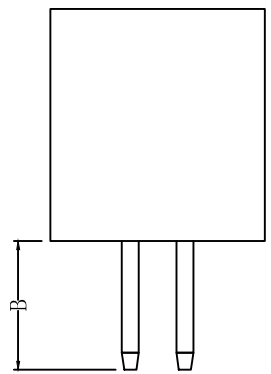
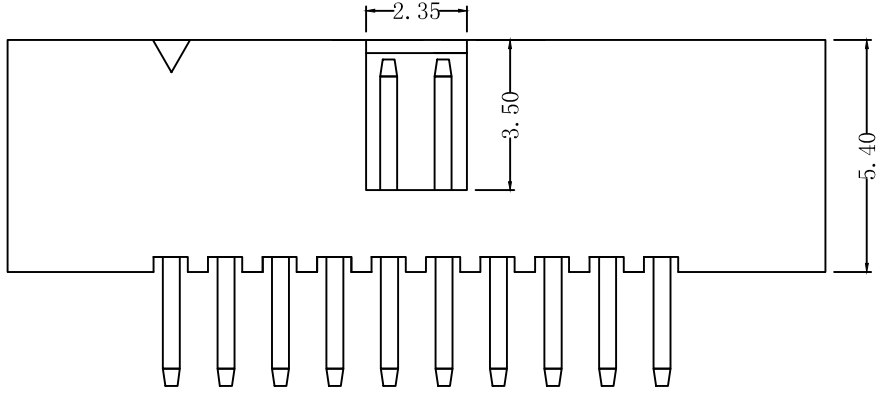


REV	DESCRIPTION	DATE

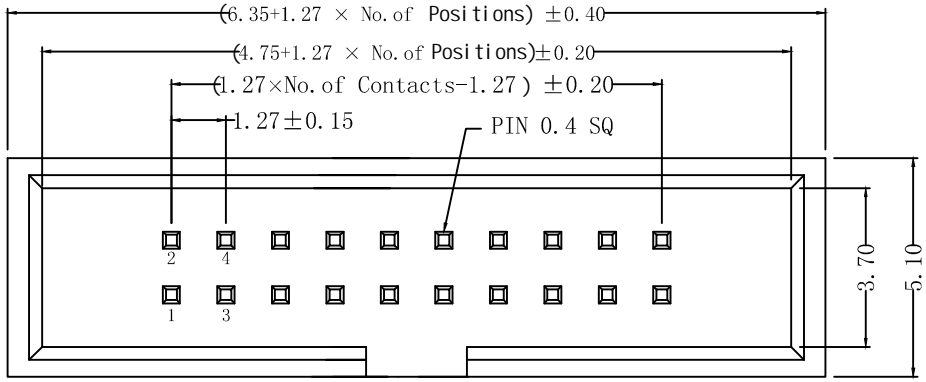


**SPECIFICATIONS**

Current Rating: 1.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 300 V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C


**MATERIALS**

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

**Recommended P. C. Board Hole Layout**



**Ordering Information**

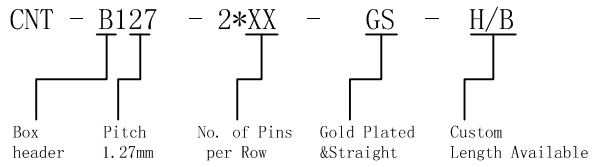

A		E	
B	2.3	F	
H	5.4	W	

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL	TOLERANCE	DRAWN	董道丽	DATE	20190819	DWG. NO.	TITLE		
				X.°	±5°	X.	±0.30	CHECK	王芳芳	DATE		20190819	PART. NO.
REV.	UNIT	SCALE		.X°	±3°	.X	±0.38	APPROVE	王元中	DATE	20190819	CNT-B127-2*XX-GS-540/B	
1.0	mm	1:1		.XX°	±2°	.XX	±0.25						
				.XXX°	±1°	.XXX	±0.15						