

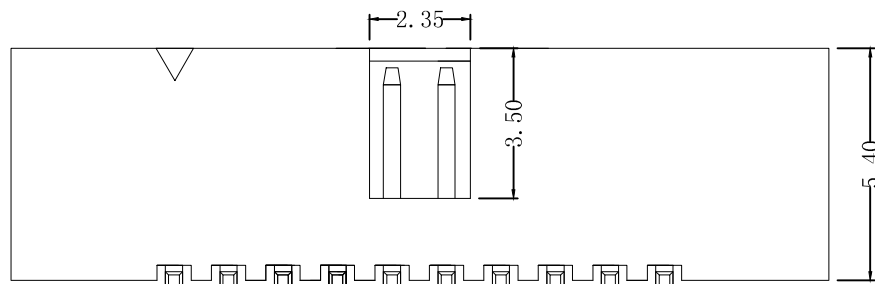


REV	DESCRIPTION	DATE

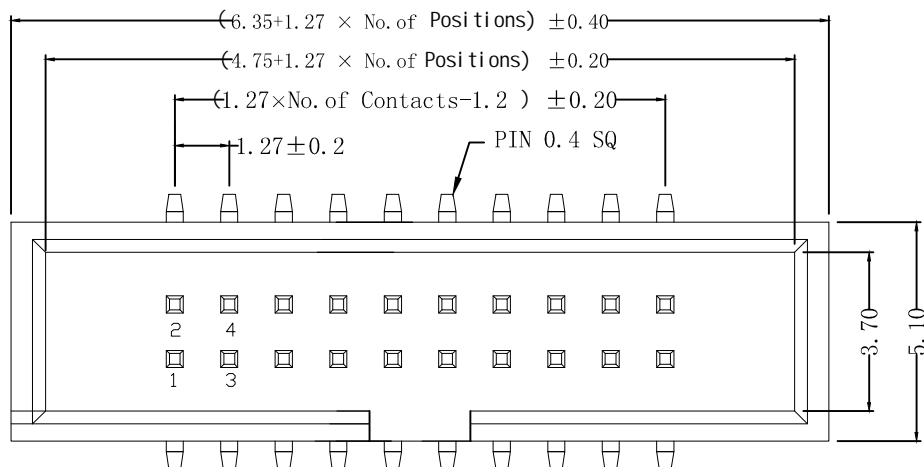


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C


MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P.C. Board Hole Layout

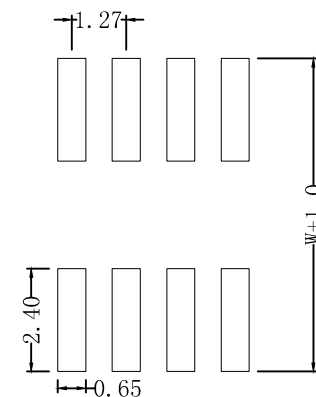

Ordering Information

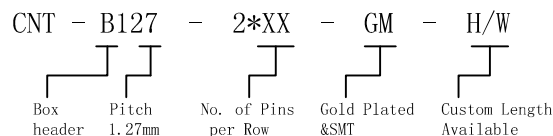

A		E	
B		F	
H	5.4	W	5.5

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190708		
REV.	UNIT	SCALE	DRAWN		CHECK	DATE	PART. NO.	
1.0	mm	1:1	X.° ±3°		王芳芳	20190708		筒牛1.27 H5.4 SMT
			.XX° ±2°		王元中	20190708	CNT-B127-2*XX-GM-540/W	
			.XXX° ±1°					