

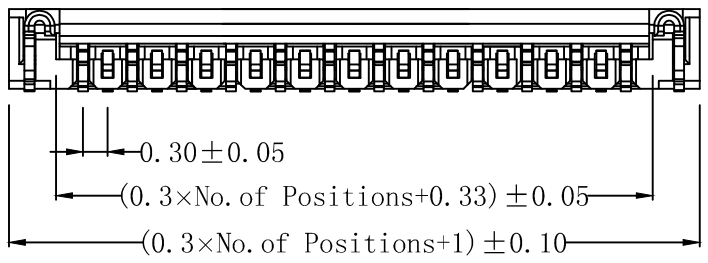


REV	DESCRIPTION	DATE

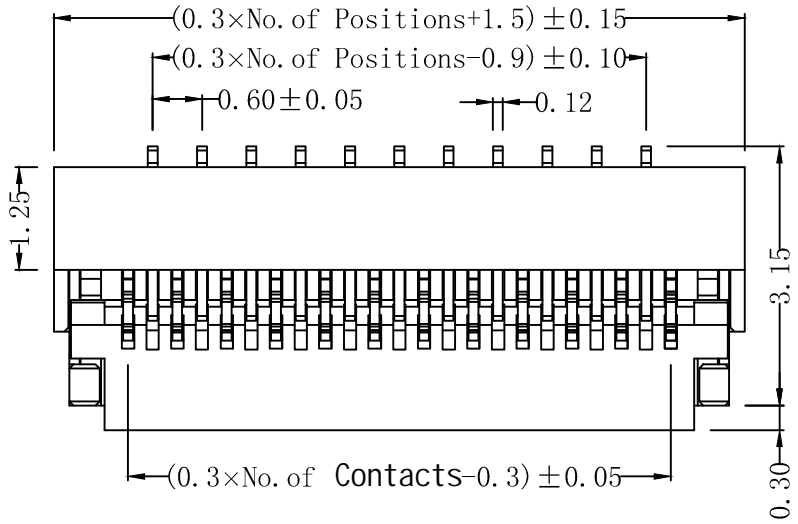

NOTE:

- MATERIAL AND FINISH

HOUSING: NATURAL, HIGH-TEMP. THERMOPLASTIC. UL 94V-0.

ACTUATOR: BLACK, HIGH-TEMP. THERMOPLASTIC. UL 94V-0.

CONTACT: COPPER ALLOY. PLATING: GOLD PLATED OVER NICKEL.

HOLDDOWN: COPPER ALLOY. PLATING: TIN PLATED OVER NICKEL.
- ELECTRICAL

CURRENT: 0.3A MAX.

VOLTAGE : 30V MAX.


DIELECTRIC WITHSTANDING VOLTAGE: 250V AC MIN.

CONTACT RESISTANCE: 30mΩ MAX.

INSULATION RESISTANCE: 50MΩ MIN.
- ENVIRONMENTAL

TEMPERATURE: -25°C TO +85°C
- PART NO.

CNT-FPC030-XX-GDM-S20-100

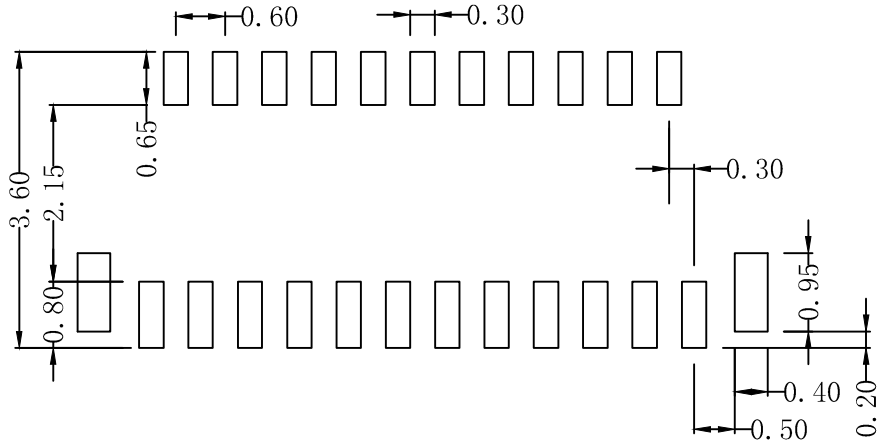

RECOMMENDED PCB LAYOUT

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN 董道丽		DATE 20191011		DWG. NO.		TITLE	
				X.° ±5°	X. ±0.30	CHECK 王芳芳		DATE 20191011		PART. NO.			
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	APPROVE 王元中		DATE 20191011		CNT-FPC030-XX-GDM-S20-100		FPC 0.3 PITCH 单面下接触 掀盖式平脚位SMT90度	
				.XX° ±2°	.XX ±0.25								
				.XXX° ±1°	.XXX ±0.15								