
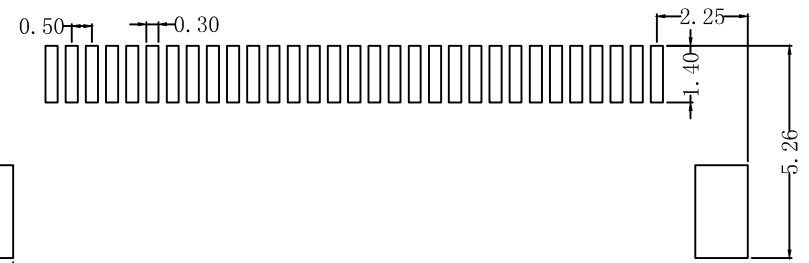


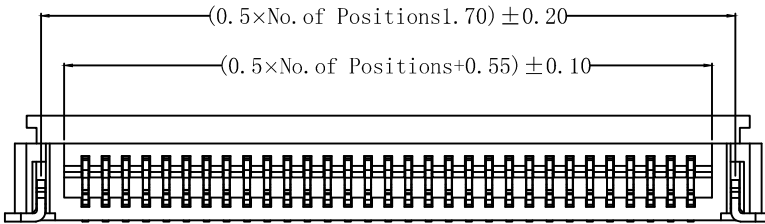


REV	DESCRIPTION	DATE

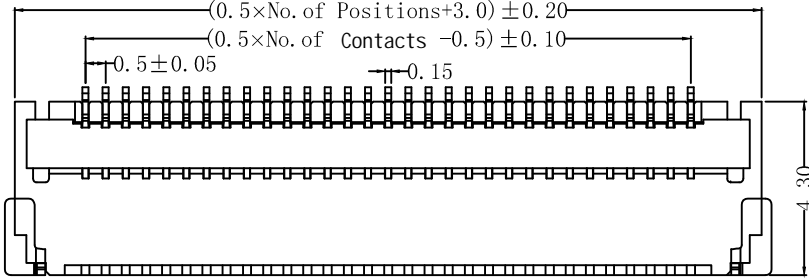

NOTE:

- MATERIAL
 HOUSING:HIGH-TEMP, THERMOPLASTIC, UL 94V-0.
 CONTACT:COPPER ALLOY.
 PLATING:TIN OR GOLD PLATED OVER NICKEL.
 HOLDDOWN:COPPER ALLOY.
 PLATING:TIN OR GOLD PLATED OVER NICKEL.
- PART NO.
 CNT-FPC050-XX-TDM-D30-200

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20191011	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30				
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20191011	PART. NO. CNT-FPC050-XX-TDM-D30-200	FPC pitch 0.5mm 双面接触 前插后锁 掀盖式SMT90度 (H=2.0mm)
				.XX° ±2°	.XX ±0.25				
				.XXX° ±1°	.XXX ±0.15				