

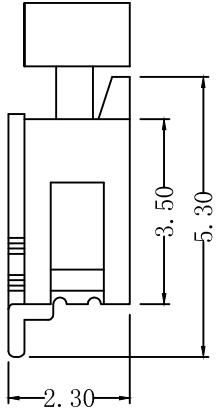
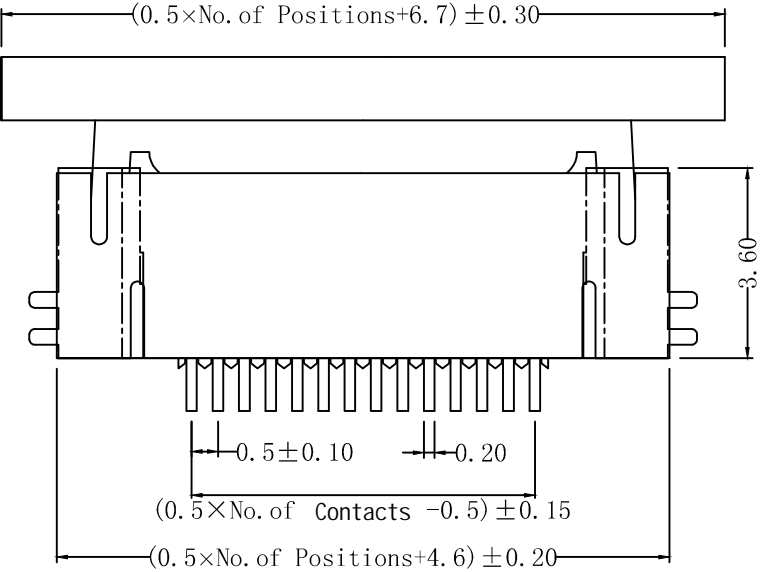


REV	DESCRIPTION	DATE

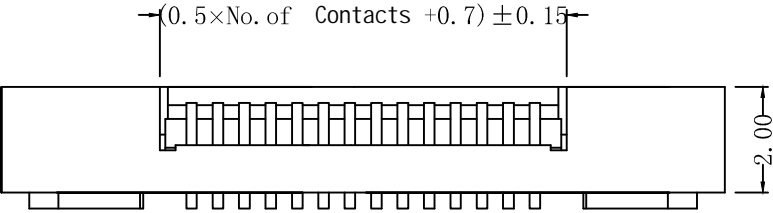

NOTE:

- MATERIAL AND FINISH
 - HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 - ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 - CONTACT:PHOSPHOR BRONZE.
 - PLATING:TIN OR GOLD PLATED OVER NICKEL.
 - HOLDDOWN:BRASS. PLATING:TIN PLATED OVER NICKEL.
- ELECTRICAL
 - CURRENT:0.5A MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.
 - CONTACT RESISTANCE:30mΩ MAX.
 - INSULATION RESISTANCE:100MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE:-20°C TO +85°C
- PART NO.
 - CNT-FPC050-XX-TDM-S11-230

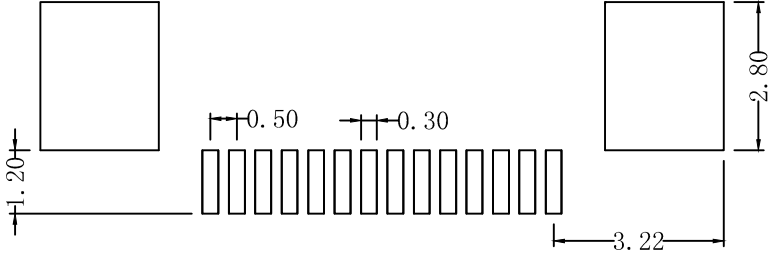

RECOMMENDED PCB LAYOUT

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN 董道丽	DATE 20191011	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	CHECK 王芳芳	DATE 20191011	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1	⊕	.X° ±3° .X ±0.38	APPROVE 王元中	DATE 20191011	CNT-FPC050-XX-TDM-S11-230	FPC 0.5 PITCH ZIF LOCK UPPER CONTACT FOR SMT90° TYPE
				.XX° ±2° .XX ±0.25				
				.XXX° ±1° .XXX ±0.15				