

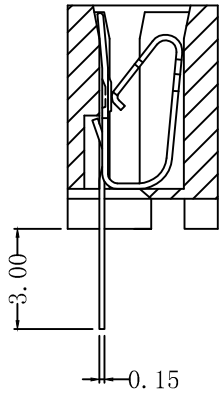


REV	DESCRIPTION	DATE

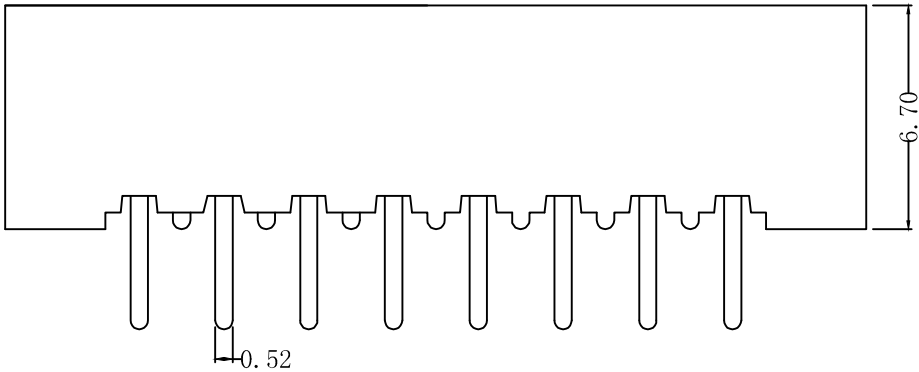

NOTE:

- MATERIAL  
HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.  
CONTACT: COPPER ALLOY.  
PLATING: TIN PLATED OVER NICKEL
- ELECTRICAL  
CURRENT RATING: 3.0AMP.  
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC MIN.  
INSULATION RESISTANCE: 1000MΩ MIN.  
CONTACT RESISTANCE: 30mΩ MAX.
- ENVIRONMENTAL  
TEMPERATURE RANGE: -25°C TO +85°C.
- PART NO.  
CNT-FPC254-XX-TS-S3-670

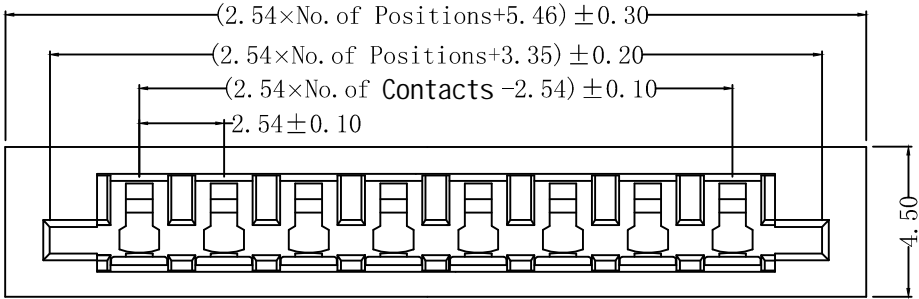

RECOMMENDED PCB LAYOUT

<p><b>CNT</b> 肯耐特电子有限公司</p>			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20191011		
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.
				.XX° ±2°	.XX ±0.25	王芳芳	20191011	
				.XXX° ±1°	.XXX ±0.15	王元中	DATE	CNT-FPC254-XX-TS-S3-670
								FPC 2.54 PITCH 双面接触 平脚位 DIP 180°