
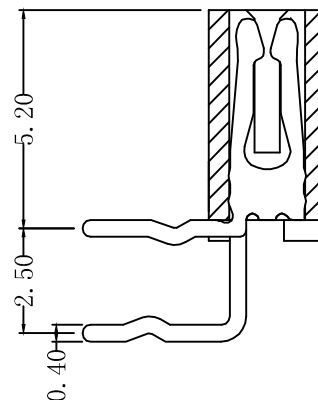
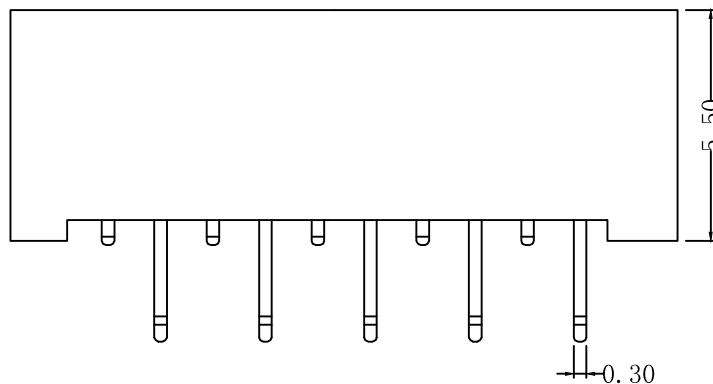


REV	DESCRIPTION	DATE

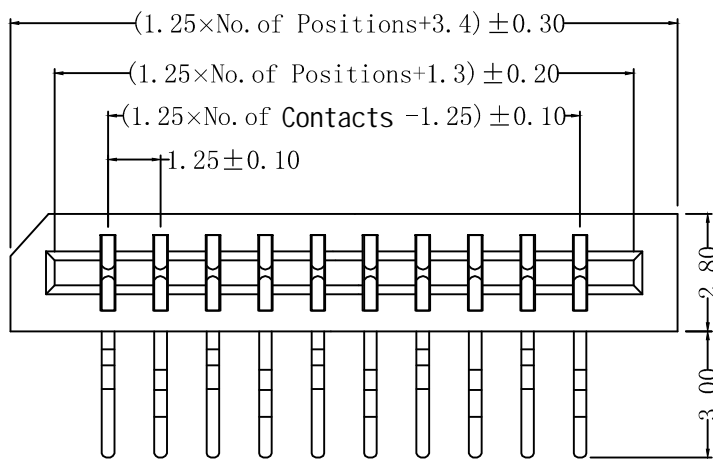

NOTE:

■ MATERIAL

HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.  
 CONTACT: COPPER ALLOY.  
 PLATING: TIN PLATED OVER NICKEL.

■ ELECTRICAL


CURRENT RATING: 1.0 AMP.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.  
 INSULATION RESISTANCE: 500MΩ MIN.  
 CONTACT RESISTANCE: 30mΩ MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C TO +85°C.

■ PART NO.

CNT-FPC125-XX-TD-D2-550

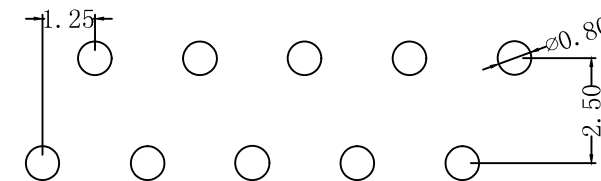

RECOMMENDED PCB LAYOUT

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN	董道丽	DATE	20191011	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20191011	PART. NO.	
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20191011	CNT-FPC125-XX-TD-D2-550	FPC/FFC 1.25 PITCH NON ZIF SIDE ENTRY DUAL CONTACT DIP TYPE DIP90°
1.0	mm	1:1		.XX° ±2°	.XX ±0.25						
				.XXX° ±1°	.XXX ±0.15						