

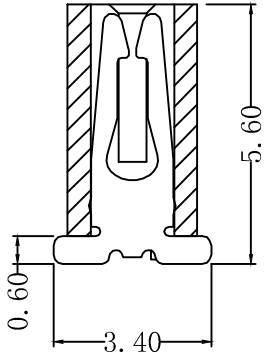
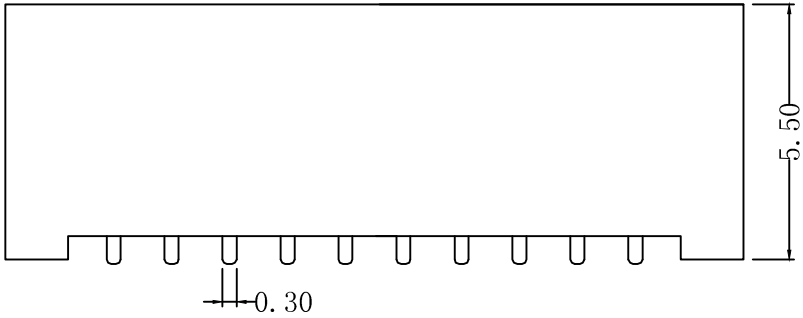


REV	DESCRIPTION	DATE

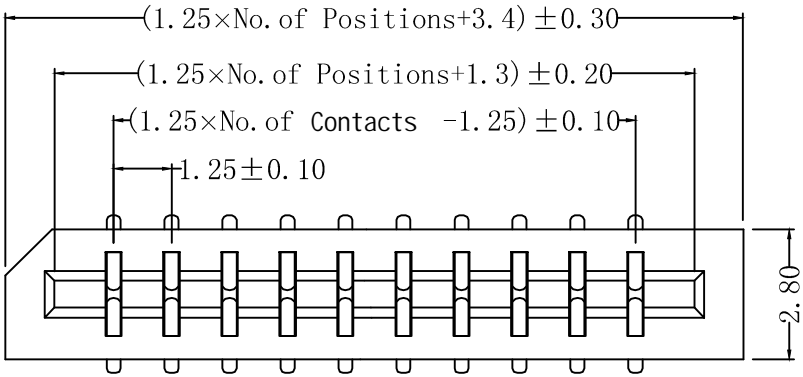

NOTE:

- MATERIAL  
HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.  
CONTACT: COPPER ALLOY.  
PLATING: TIN PLATED OVER NICKEL.
- ELECTRICAL  
CURRENT RATING: 1.0AMP.  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.  
INSULATION RESISTANCE: 500MΩ MIN.  
CONTACT RESISTANCE: 30mΩ MAX.
- ENVIRONMENTAL  
TEMPERATURE RANGE: -25°C TO 85°C.
- PART NO.  
CNT-FPC125-XX-TSM-D0-550

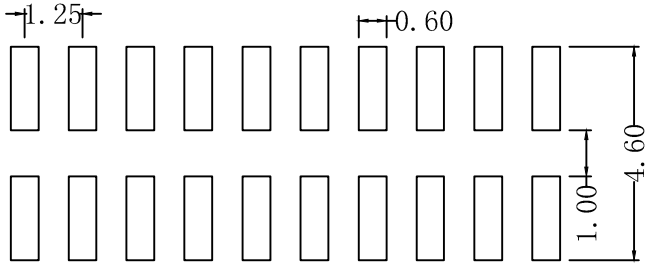

RECOMMENDED PCB LAYOUT

<p><b>CNT</b> 肯耐特电子有限公司</p>		GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE	
		X.° ±5°	X. ±0.30	董道丽	20191011			
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	CHECK	DATE	
				.XX° ±2°	.XX ±0.25	王芳芳	20191011	PART. NO.
				.XXX° ±1°	.XXX ±0.15	王元中	20191011	CNT-FPC125-XX-TSM-D0-550