

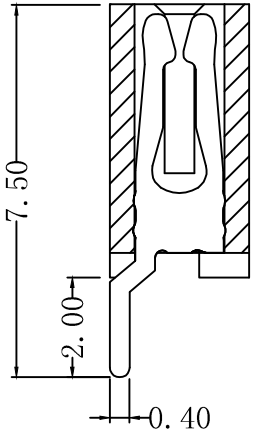
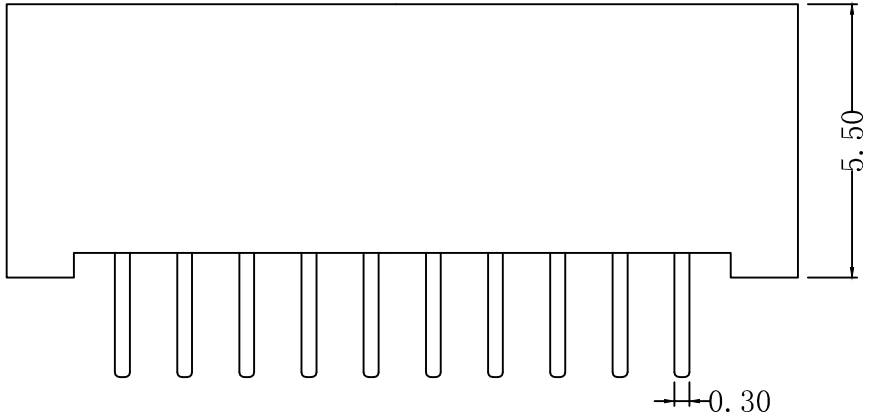


REV	DESCRIPTION	DATE

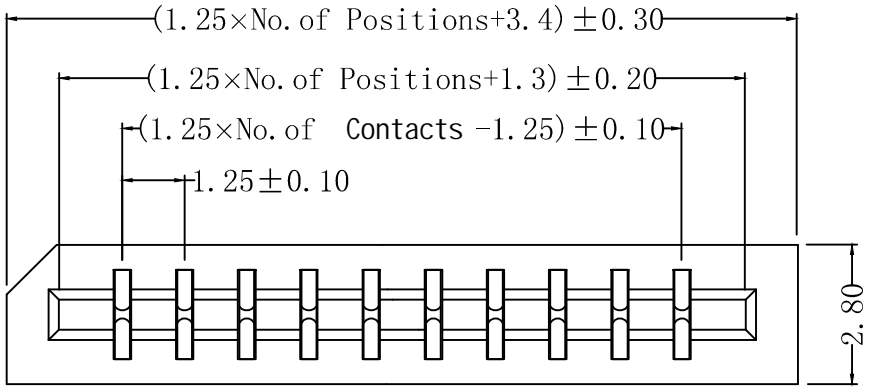

NOTE:

- MATERIAL
HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.
CONTACT: COPPER ALLOY.
PLATING: TIN PLATED OVER NICKEL.
- ELECTRICAL
CURRENT RATING: 1.0AMP.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
INSULATION RESISTANCE: 500MΩ MIN.
CONTACT RESISTANCE: 30mΩ MAX.
- ENVIRONMENTAL
TEMPERATURE RANGE: -25°C TO +85°C.
- PART NO.
CNT-FPC125-XX-TDM-D3-550

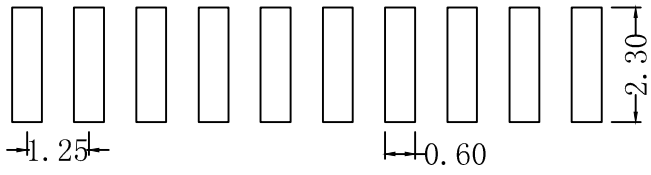

RECOMMENDED PCB LAYOUT

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	董道丽	DATE	20191011	DWG. NO.	TITLE FPC/FFC 1.25 PITCH NON ZIF SIDE ENTRY DUAL CONTACT SMT TYPE-PARALLELED PCB LAYOUT
				X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20191011	PART. NO.	
.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20191011	CNT-FPC125-XX-TDM-D3-550					
.XX° ±2°	.XX ±0.25										
REV. 1.0	UNIT mm	SCALE 1:1		.XXX° ±1°	.XXX ±0.15						