
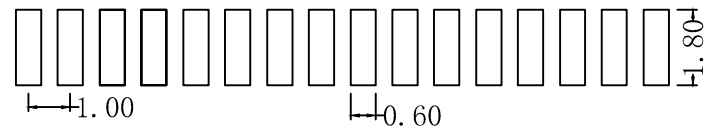

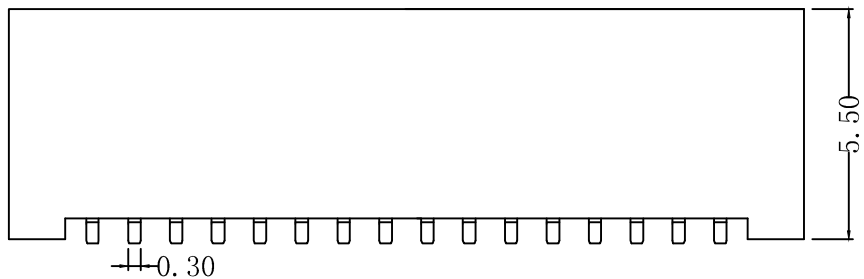


REV	DESCRIPTION	DATE

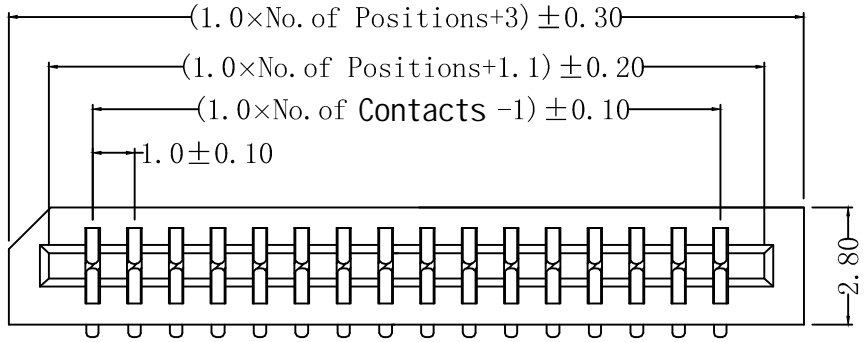

RECOMMENDED PCB LAYOUT

- NOTE:**
- **MATERIAL**  
 HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.  
 CONTACT: COPPER ALLOY.  
 PLATING: TIN PLATED OVER NICKEL.
  - **ELECTRICAL**  
 CURRENT RATING: 1.0 AMP.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.  
 INSULATION RESISTANCE: 500MΩ MIN.  
 CONTACT RESISTANCE: 30mΩ MAX.
  - **ENVIRONMENTAL**  
 TEMPERATURE RANGE: -25°C TO 85°C.
  - **PART NO.**  
 CNT-FPC100-XX-TSM-D3-550

<b>CNT</b> 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	董道丽	DATE	20191011	DWG. NO.	TITLE FPC 1.0 PITCH CONNECTOR TOP ENTRY DUAL SMT TYPE 单边平脚位
				X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20191011	PART. NO.	
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20191011	CNT-FPC100-XX-TSM-D3-550	
1.0	mm	1:1		.XX° ±2°	.XX ±0.25						
				.XXX° ±1°	.XXX ±0.15						