
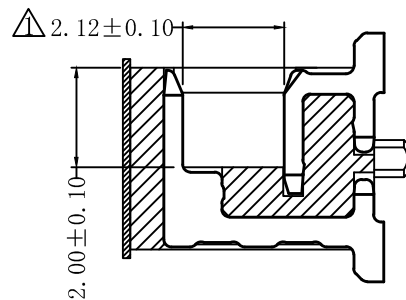


RoHS

REV	DESCRIPTION	DATE
1.0	Release	20150513
2.0	△尺寸变更	20211223

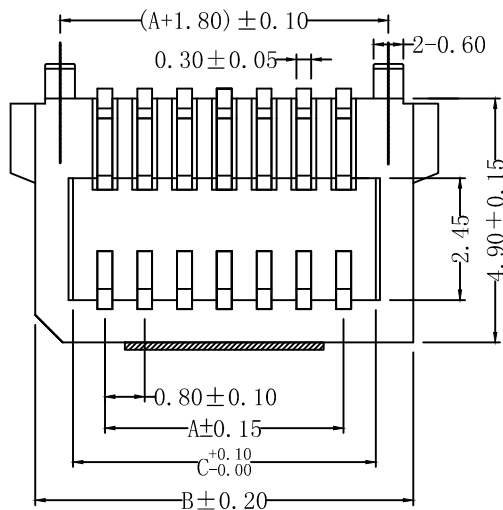

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: AC 500 V

Contact Resistance: 20mΩ Max.

Operating Temperature: -40° C to +105° C



Materials

Contact Material: Brass


Insulator Material: High Temperature

Thermoplastic, UL 94V-0 Nylon 6T

or the equivalent material

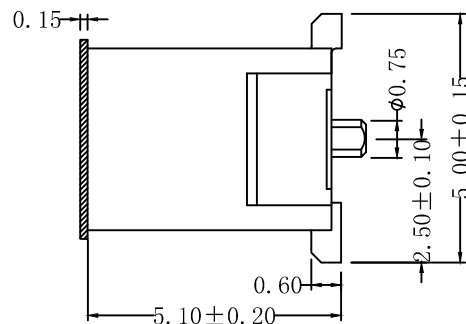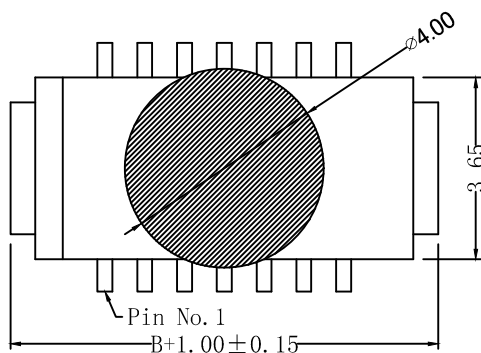

Recommended P. C. Board Hole Layout

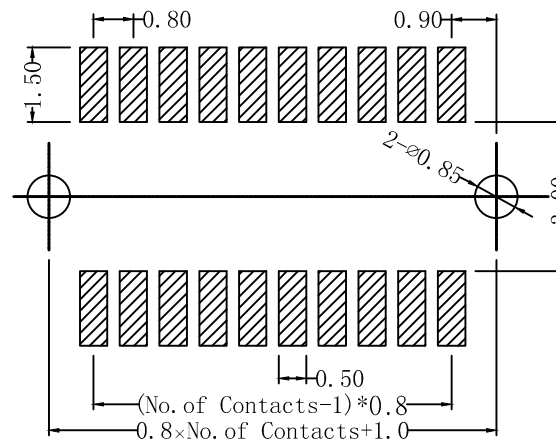

CIRCURTS	DIM A	DIM B	DIM C
10	3.20	6.00	4.66
12	4.00	6.80	5.46
14	4.80	7.60	6.26
16	5.60	8.40	7.06
18	6.40	9.20	7.86
20	7.20	10.00	8.66
22	8.00	10.80	9.46
24	8.80	11.60	10.26
26	9.60	12.40	11.06
28	10.40	13.20	11.86
30	11.20	14.00	12.66
32	12.00	14.80	13.46
34	12.80	15.60	14.26
36	13.60	16.40	15.06
38	14.40	17.20	15.86
40	15.20	18.00	16.66
42	16.00	18.80	17.46
44	16.80	19.60	18.26
46	17.60	20.40	19.06
48	18.40	21.20	19.86
50	19.20	22.00	20.66
52	20.00	22.80	21.46
54	20.80	23.60	22.26
56	21.60	24.40	23.06
58	22.40	25.20	23.86
60	23.20	26.00	24.66

A		E	
B		F	
H	5.1	W	5.0

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN 董道丽		DATE 20211223		DWG. NO.		TITLE	
				X.° ±5°	X. ±0.30	CHECK 王芳芳		DATE 20211223		20211223001			
REV. 2.0	UNIT mm	SCALE 1:1			.X° ±3°	.X ±0.38	APPROVE 王元中		DATE 20211223		PART. NO. CNT-F080-2*XX-GM-510/5.0		
					.XX° ±2°	.XX ±0.25					0.8mm Female header SMT Type		
				.XXX° ±1°	.XXX ±0.15								