


RoHS

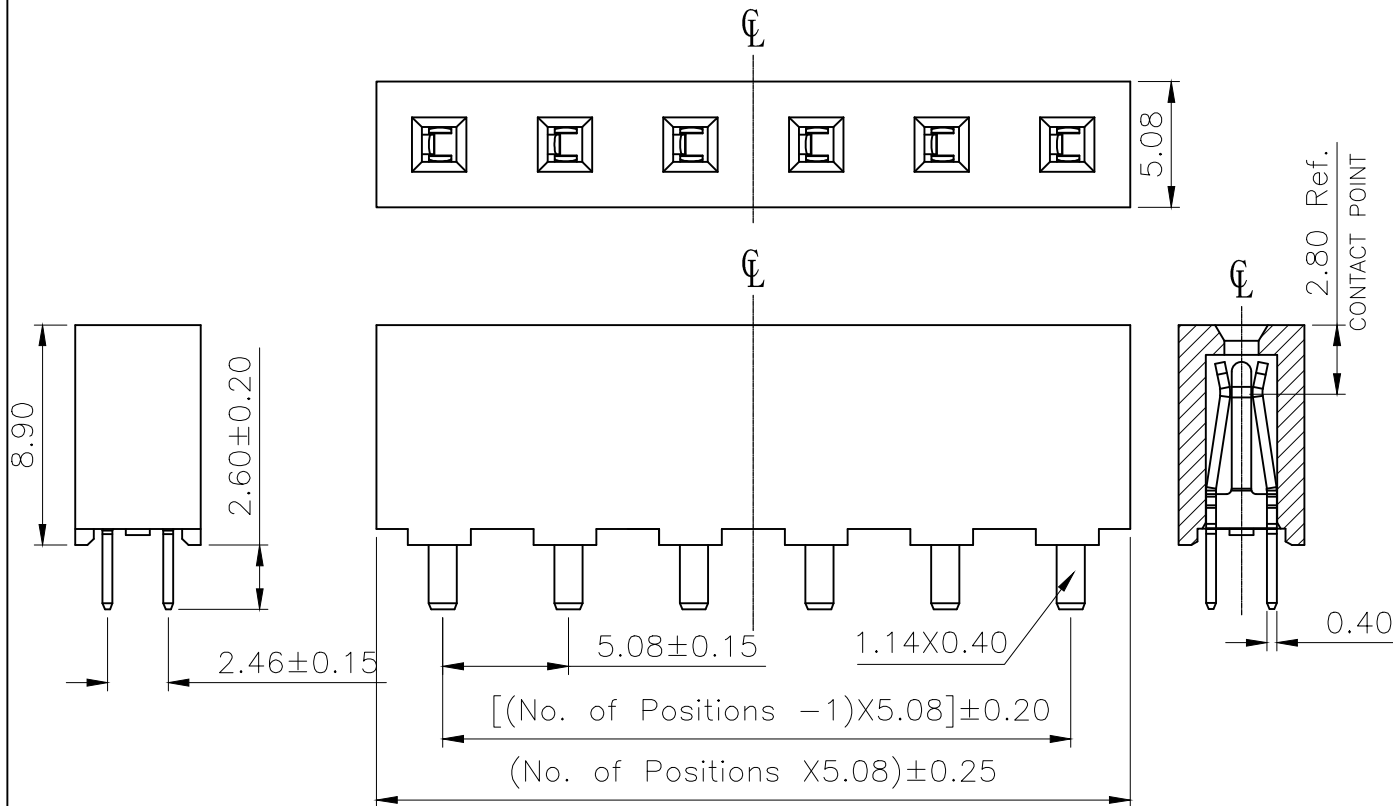

02		Change Ordering Information	2007.05.25	黃美君
03		Change Ordering Information	2007.05.31	黃美君
04		Change Ordering Information	2007.06.04	黃美君
05		修正阻抗30mΩ→20mΩ;修正工作溫度105° C→125° C	2007.10.08	許承佑
06		變更料號	2009.04.08	車 激
07		變更新圖號, 修改注解	2011.09.24	李劍峰

Specifications

- Current Rating: 7.9Amp
- Insulation Resistance: 5000M Ω Min.
- Dielectric Withstanding: 1500V AC
- Contact Resistance: 20mΩ Max.
- Operating Temperature: -55°C to +125°C

MATERIAL:

-HOUSING: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material.  
COLOR:BLACK.


-CONTACT:Phosphor Bronze

PLATING:

50u" Nickel UNDER PLATING ALL OVER,  
100u" Matte Tin PLATING(FREE LEAD),


Recommended P.C.Board Layout

(Tolerance:±0.05)

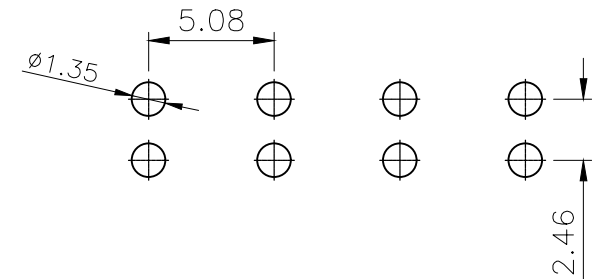

Ordering Information

CNT - F508 - 1\*XX - TS - H - B

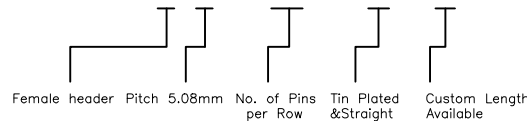

A		E	
B	2.60	F	
H	8.90	W	

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN 董道丽	DATE 20190325	DWG. NO.	TITLE 5.08 PITCH POWER SOCKETS DIP TYPE
				X. ° ±5° X. ±0.30	CHECK 王芳芳	DATE 20190325	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3° .X ±0.25	APPROVE 王元中	DATE 20190325	CNT-F508-1*XX-TS-890/2.6	
				.XX° ±2° .XX ±0.15				
				.XXX° ±1° .XXX ±0.10				