
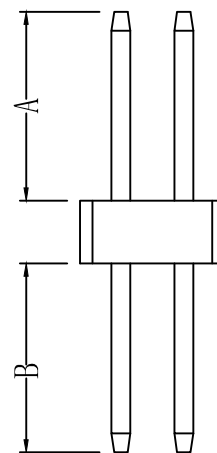
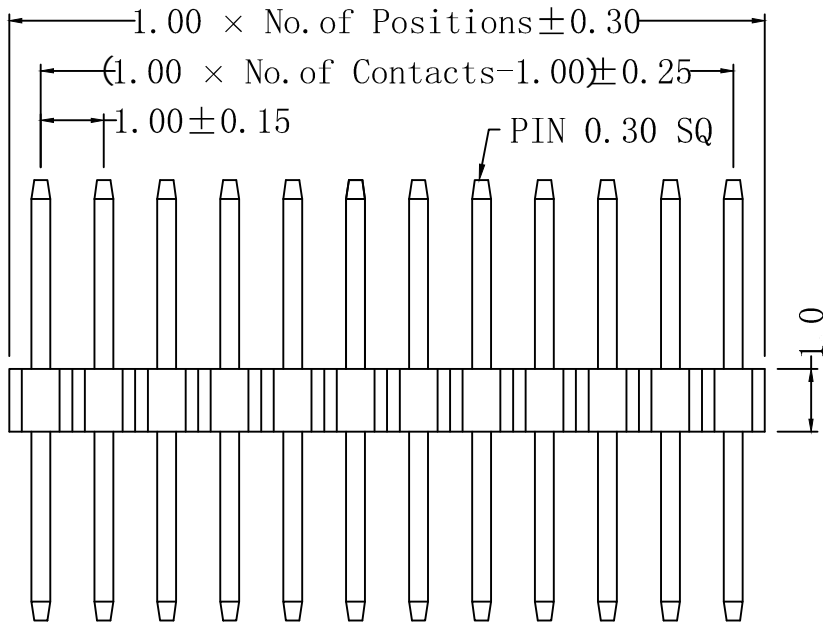


REV	DESCRIPTION	DATE

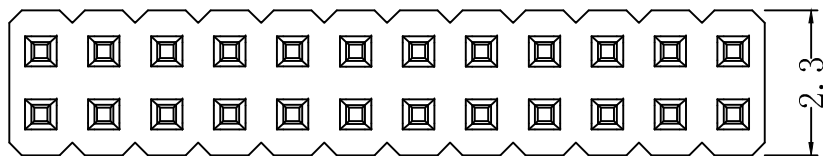


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000 mΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP
 Finish: Gold Plated over nikle
 All materials must meet RoHS requirements

Recommended P. C. Board
 Hole Layout

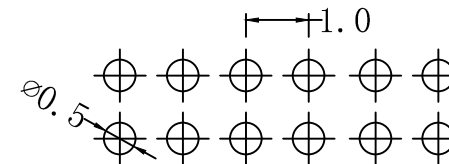

Ordering Information

CNT - M100 - 2*XX - GS - A/B - H
 Male header Pitch 1.00mm No. of Pins per Row Gold Plated & Straight Custom Length Available Plastic height

A		E	
B		F	
H	1.0	W	

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE 1.0Pin Header Dual Row Straight Type
			X.° ±5°	X. ±0.30	CHECK 王芳芳	DATE 20190321	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1	.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20190321	CNT-M100-2*xx-GS-A/B-H	
			.XX° ±2°	.XX ±0.25				
			.XXX° ±1°	.XXX ±0.15				