
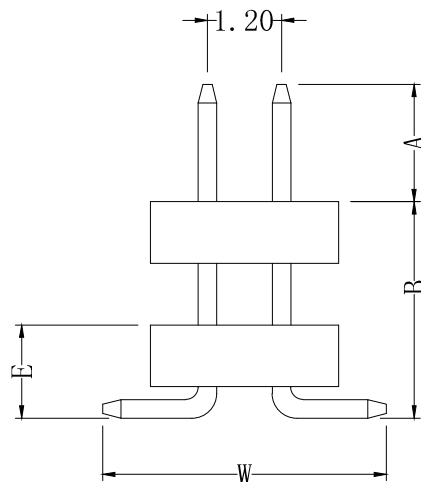
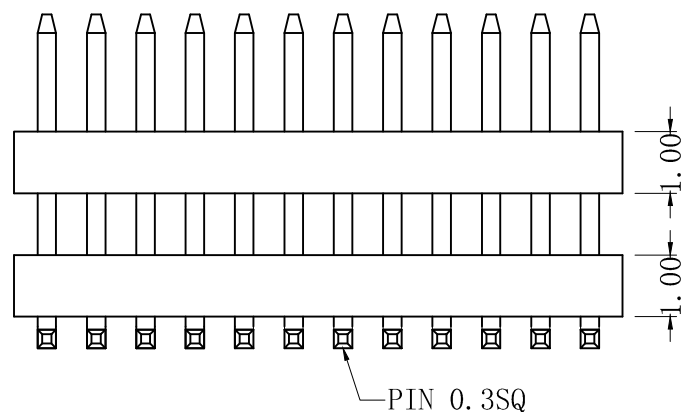


REV	DESCRIPTION	DATE

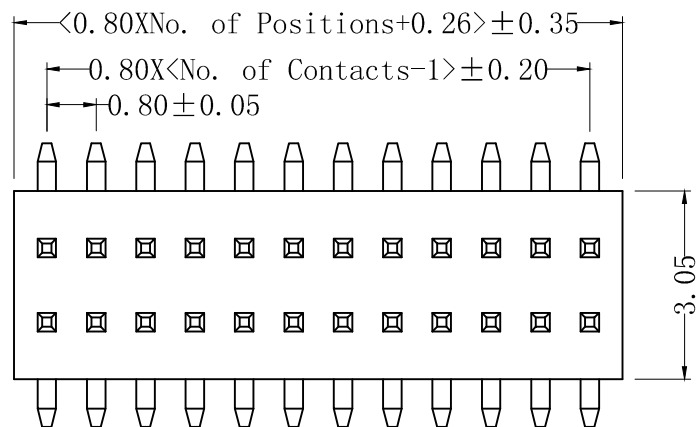


Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40° C to +105° C


Materials

Contact Material: Phosphor Bronze
 Insulation Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P. C. Board Hole Layout

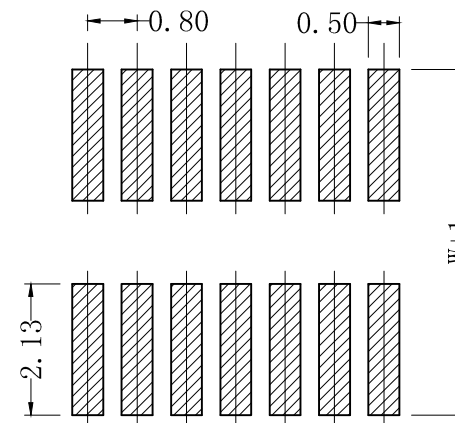

Ordering Information

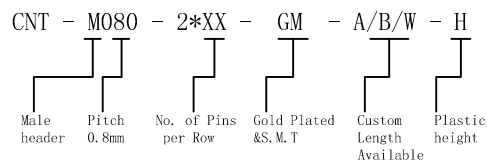

A	E
B	F
H	1.0 W

<h1>CNT</h1> 肯耐特电子有限公司			GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5° X. ±0.30	董道丽	20200515		
REV. 1.0 UNIT mm SCALE 1:1			.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.	0.80 PIN MALE HEADER DUAL ROWS SMT TYPE CONNECTOR
			.XX° ±2° .XX ±0.25	王芳芳	20200515		
			.XXX° ±1° .XXX ±0.15	APPROVE	DATE	CNT-M080-2*XX-GM-A/B/W/E	
			王元中	20200515			