
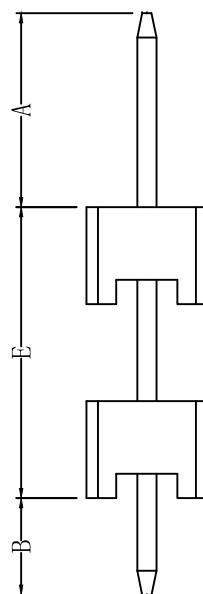
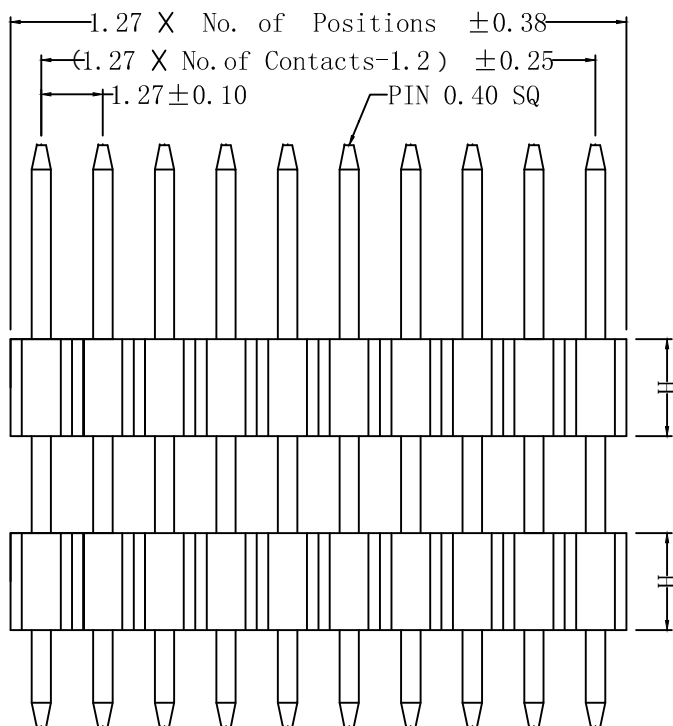


REV	DESCRIPTION	DATE

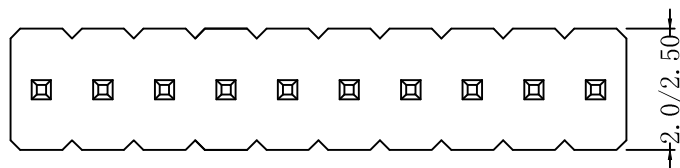


### SPECIFICATIONS

Current Rating:1.0 Amps  
 Insulator resistance:1000MΩ Min.  
 Dielectric withstanding:AC 300 V  
 Contact Resistance:20 mΩ Max  
 Operating Temperature:-40° C - +105° C


### MATERIALS

Contact Material:Copper Alloy  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish:Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

Recommended P.C. Board Hole Layout



### Ordering Information

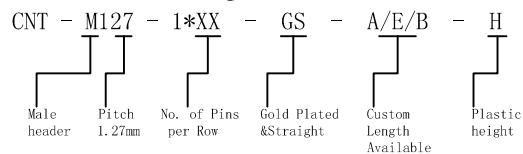

A		E	
B		F	
H	H	W	

<b>CNT</b> 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1		.XX° ±2°	.XX ±0.25	王芳芳	20190321		
				.XXX° ±1°	.XXX ±0.15	王元中	20190321	CNT-M127-1*xx-GS-A/E/B-H	
									1.27 Pin Header Single Row Straight Type