
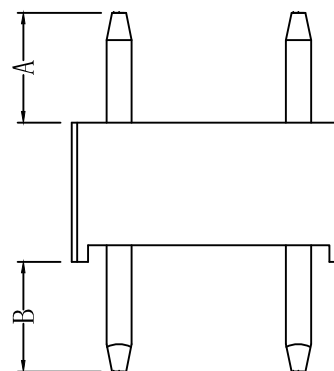
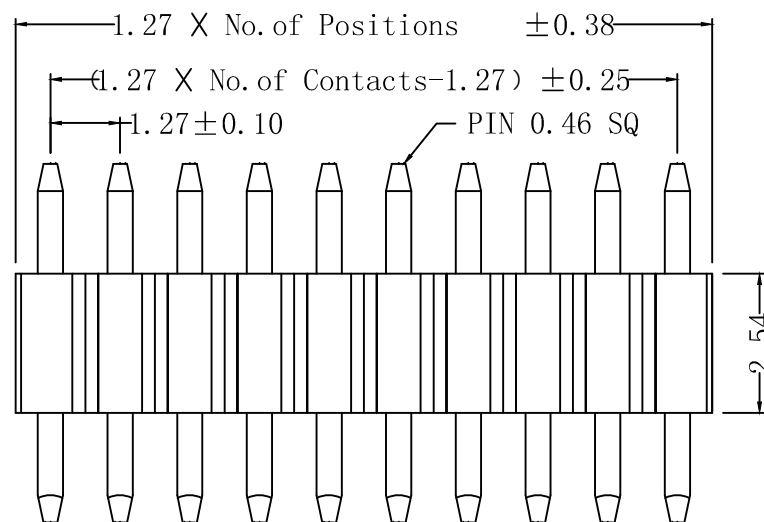


REV	DESCRIPTION	DATE

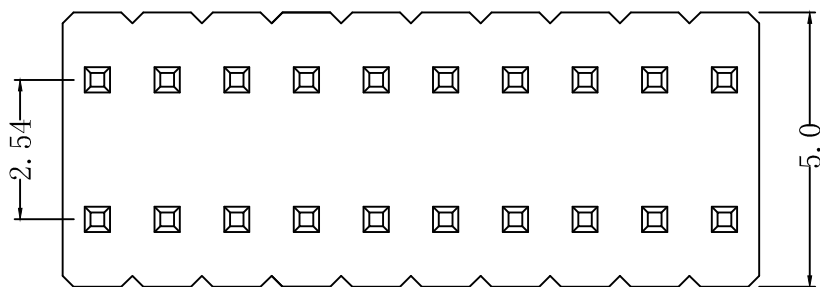


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout



Ordering Information

CNT - M127*254 - 2*XX - GS - A/B - H
 Male header Pitch 1.27*2.54mm No. of Pins per Row Gold Plated & Straight Custom Length Available Plastic height

A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV. 1.0 UNIT mm SCALE 1:1			.X° ±3°		CHECK	DATE	PART. NO.	1.27*2.54 Pin Header Dual Straight Type
			.XX° ±2°	.XX ±0.25	王芳芳	20190321		
			.XXX° ±1°		APPROVE	DATE	CNT-M127*254-2*XX-GS-A/B-H	
					王元中	20190321		