
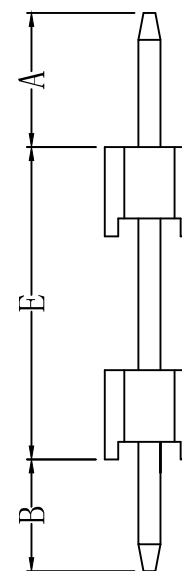
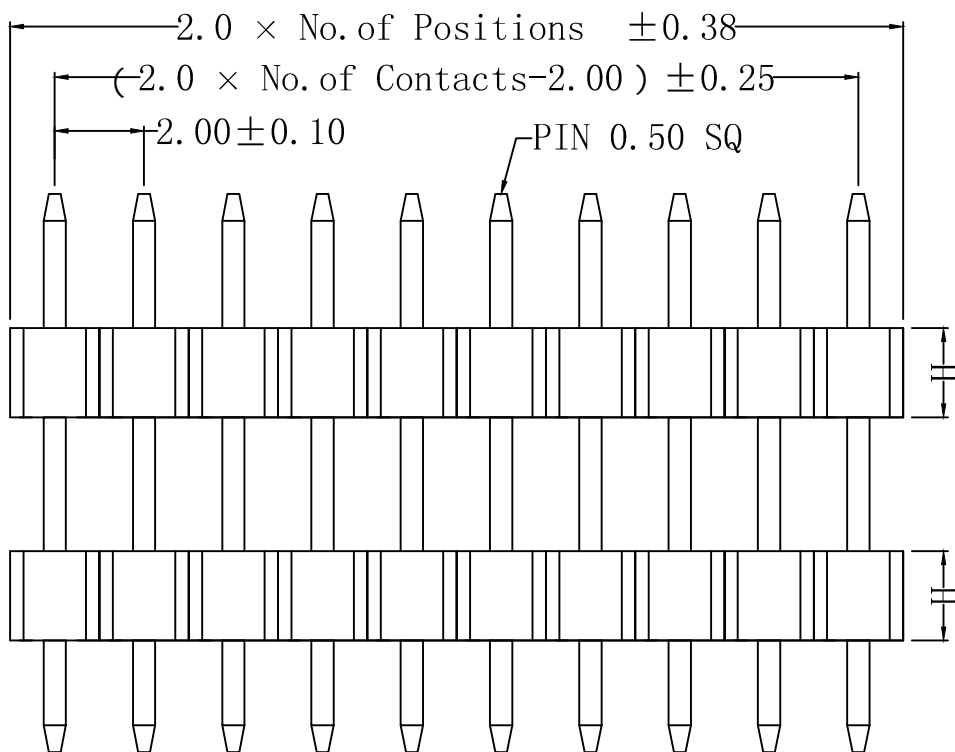


REV	DESCRIPTION	DATE




SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C


MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout



Ordering Information

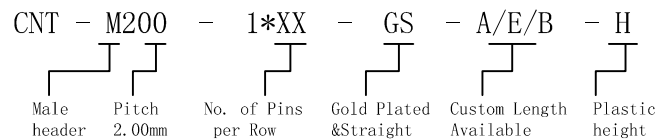

A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL	TOLERANCE	DRAWN	董道丽	DATE	20190321	DWG. NO.	TITLE 2.0mm Pin Header Board Spacer Single Row Straight Type
			.X°	±5°	.X	±0.30	CHECK	王芳芳	DATE	
REV.	UNIT	SCALE			APPROVE	王元中	DATE	20190321	CNT-M200-1*xx-GS-A/E/B-H	
1.0	mm	1:1	.XX°	±2°	.XX	±0.25				
			.XXX°	±1°	.XXX	±0.15				