


REV	DESCRIPTION	DATE

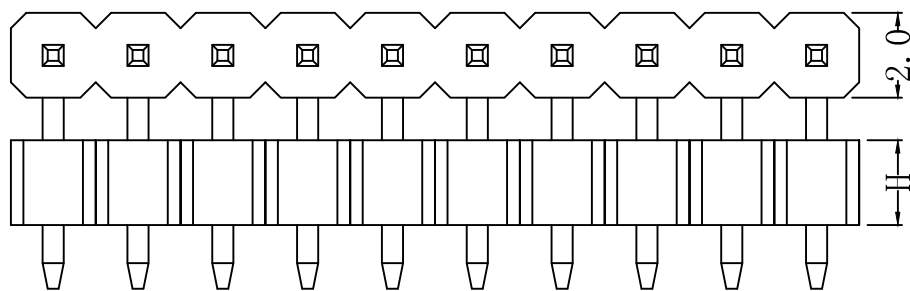



Type 2

SPECIFICATIONS


Current Rating: 2.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 500V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

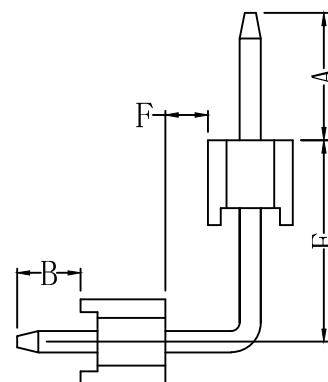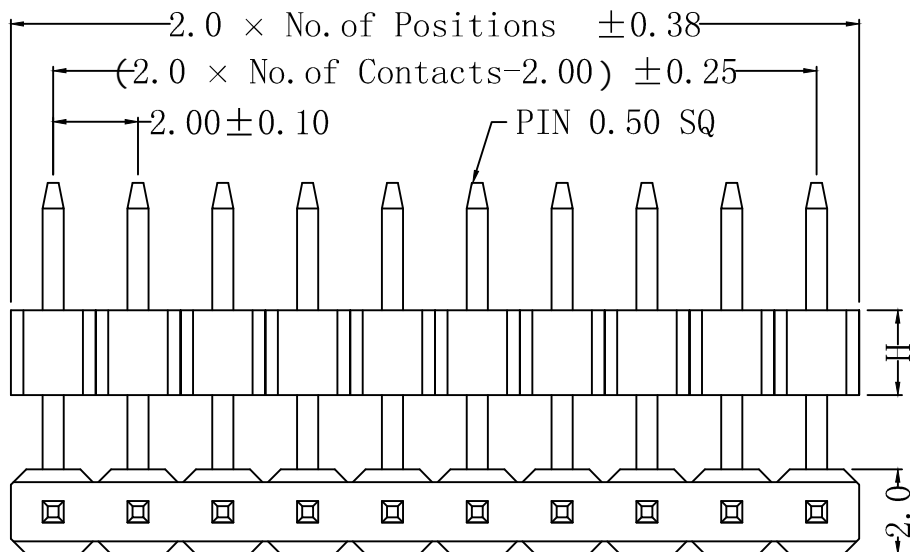

Recommended P. C. Board Hole Layout



Ordering Information

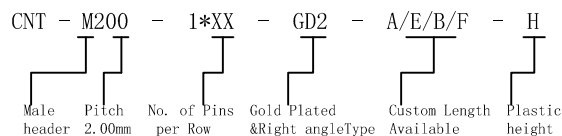

A	E
B	F
H	W

**CNT** 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X.° ±5° .X° ±3° .XX° ±2° .XXX° ±1°	董道丽	20190321	PART. NO. CNT-M200-1*xx-GD2-A/E/B/F-H	2.0mm Pin Header Single Row Right Angle Type
			X. ±0.30 .X ±0.38 .XX ±0.25 .XXX ±0.15	王芳芳	20190321		
				王元中	20190321		