

REV	DESCRIPTION	DATE





SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements


Recommended P. C. Board Hole Layout

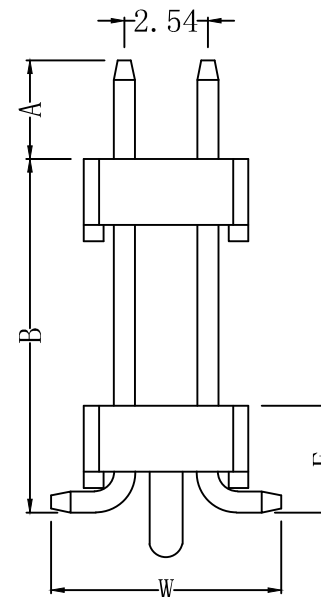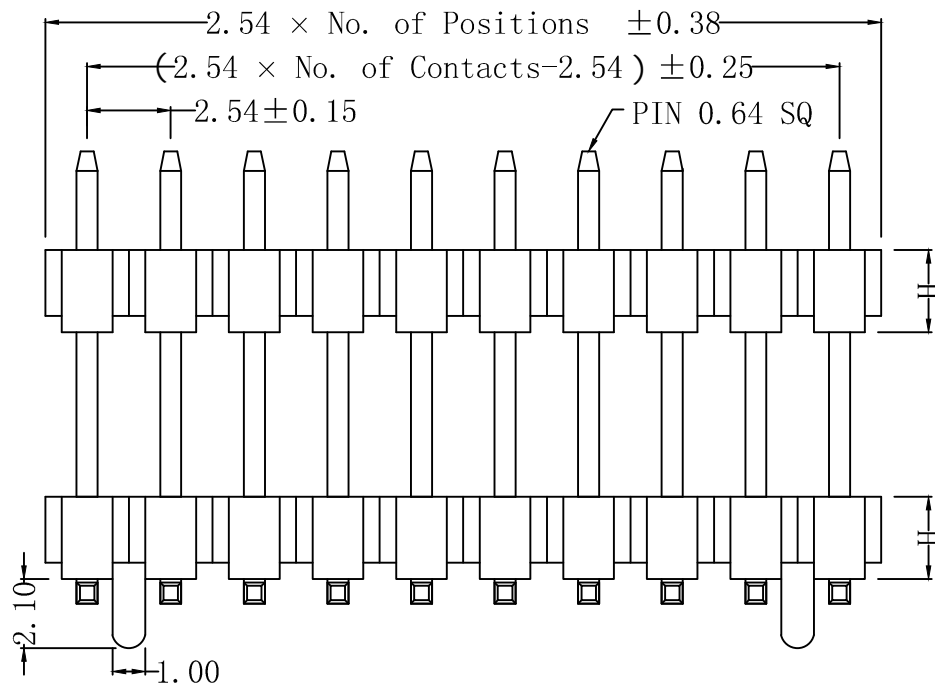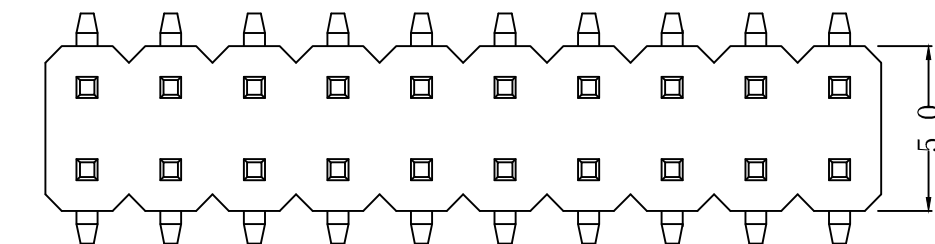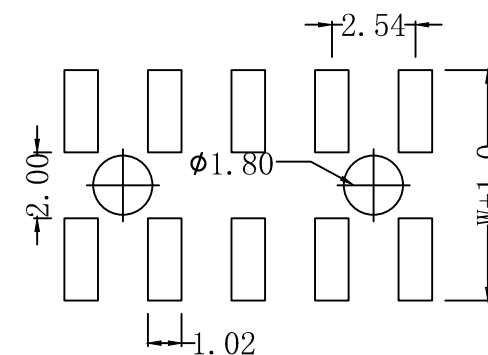

Ordering Information

CNT - M254 - 2*XX - GM - A/B/W/E - H - P

A	E
B	F
H	W

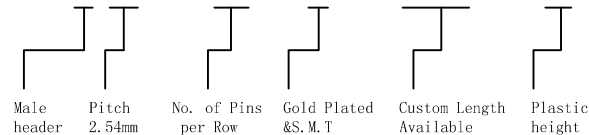

CNT 肯耐特电子有限公司

REV. 1.0	UNIT mm	SCALE 1:1	
-------------	------------	--------------	--

GENERAL	TOLERANCE
.X°	±5°
.X	±0.30
.X°	±3°
.X	±0.38
.XX°	±2°
.XX	±0.25
.XXX°	±1°
.XXX	±0.15

DRAWN	董道丽
CHECK	王芳芳
APPROVE	王元中

DATE	20190321
DATE	20190321
DATE	20190321

DWG. NO.	
PART. NO.	CNT-M254-2*xx-GM-A/B/W/E-H-P

TITLE	2.54mm Pin Header Board Spacer Dual Row SMT
-------	---------------------------------------------