
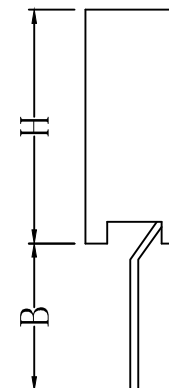
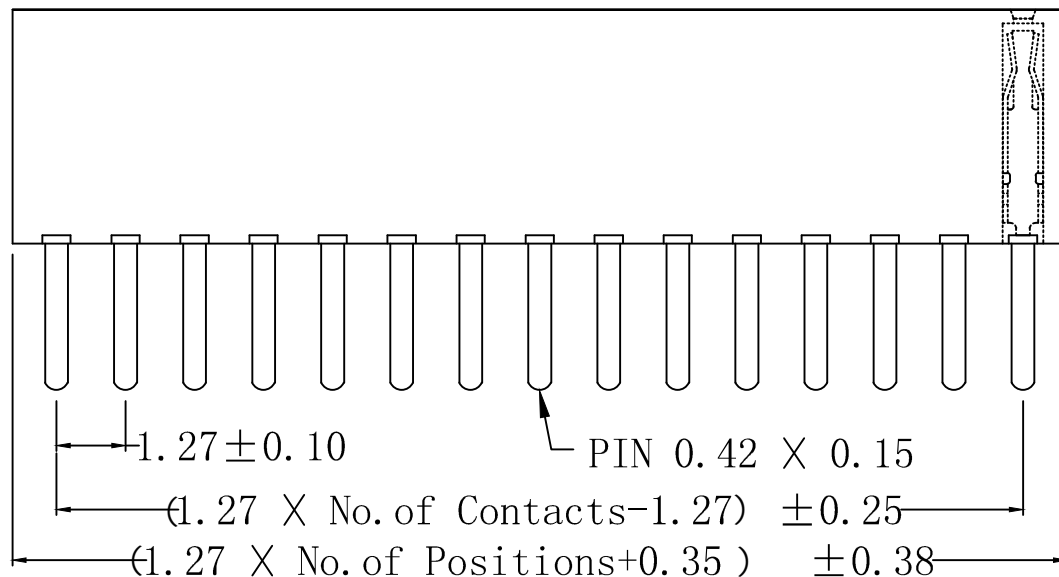


REV	DESCRIPTION	DATE



### SPECIFICATIONS


Current Rating: 1.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 300 V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS


Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickel  
 All materials must meet RoHS requirements

### Ordering Information

CNT - F127 - 1\*XX - GS - H - B

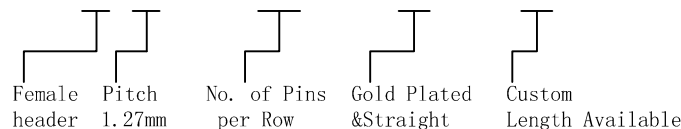

### Recommended P. C. Board Hole Layout



A		E	
B		F	
H		W	

<b>CNT</b> 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.		TITLE
				X.° ±5°	X. ±0.30	董道丽	20190321			
REV. 1.0				UNIT mm		CHECK	DATE	PART. NO.		1.27 Female Header Single Row Straight Type
				SCALE 1:1		王芳芳	20190321			
				.XX° ±2°		APPROVE	DATE	CNT-F127-1*XX-GS-H/B		
				.XXX° ±1°		王元中	20190321			