
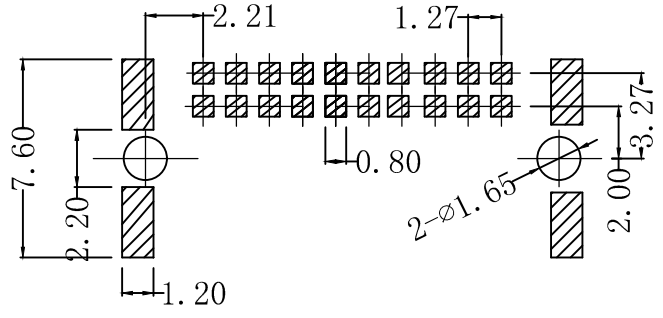
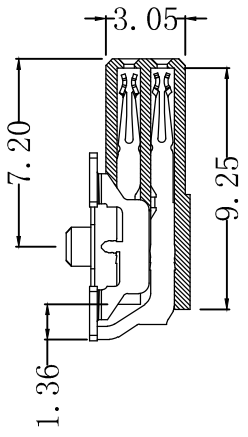
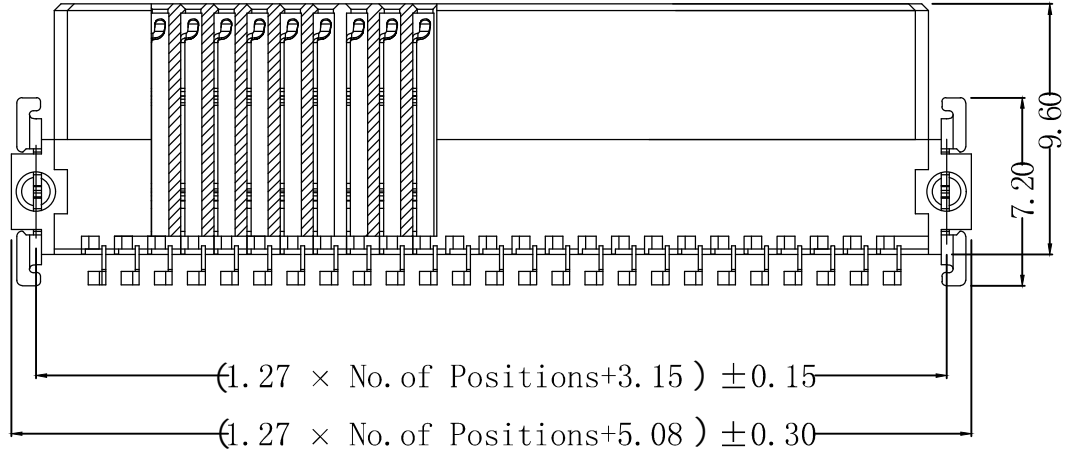


REV	DESCRIPTION	DATE

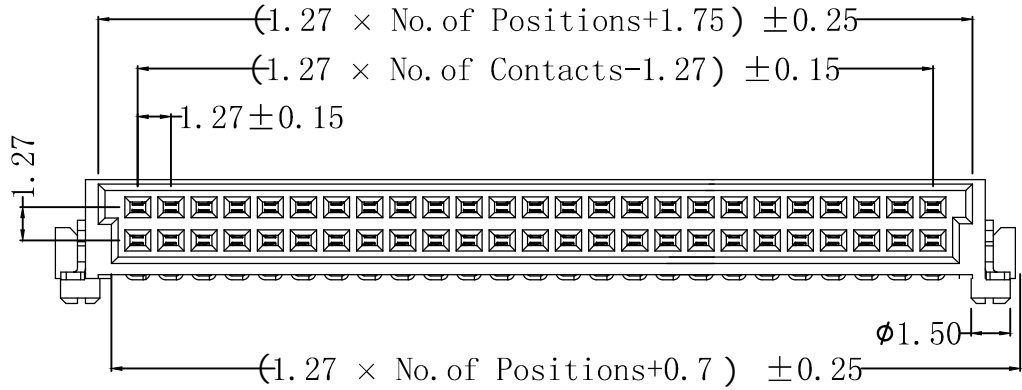

SPECIFICATIONS

Current Rating: 0.8 Amp  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: 500VAC  
 Contact Resistance: 30 mΩ Max  
 Operating Temperature: -55°C - +125°C

MATERIALS

Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material  
 Colour: Black  
 All materials must meet RoHS requirements

A	E
B	F
H	W

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE		.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.	Pitch 1.27 Female Connector SMC 90° TYPE-Q SMT TYPE
1.0	mm	1:1		.XX° ±2° .XX ±0.25	王芳芳	20190321		
			.XXX° ±1° .XXX ±0.15	APPROVE	王元中	DATE	CNT-F127-2*xx-GDM-305	