

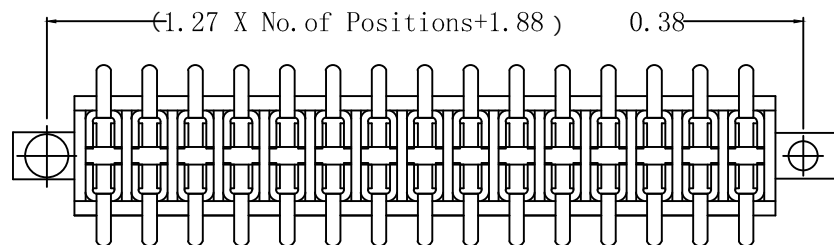

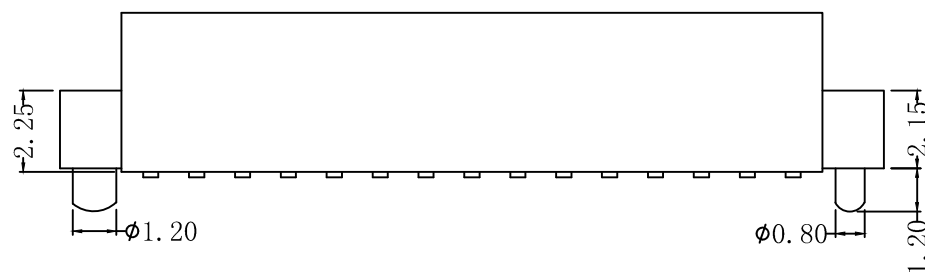


REV	DESCRIPTION	DATE

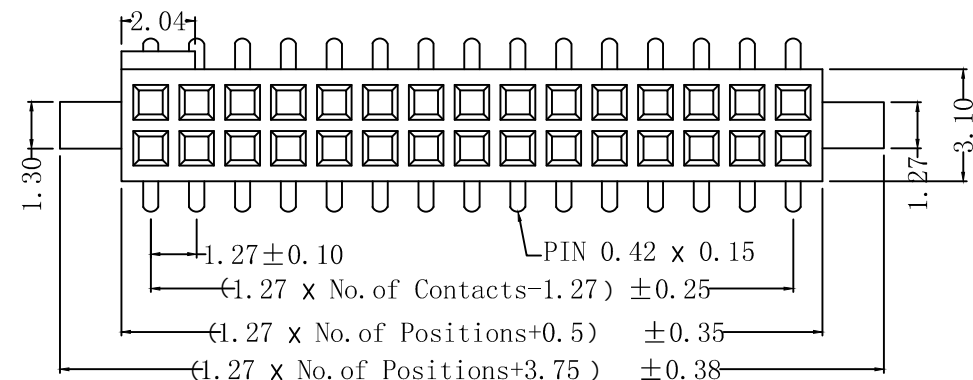

Ordering Information

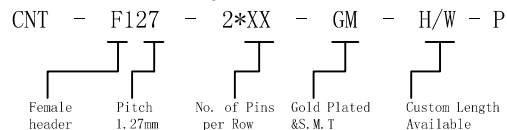

A	E
B	F
H 4.40	W


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

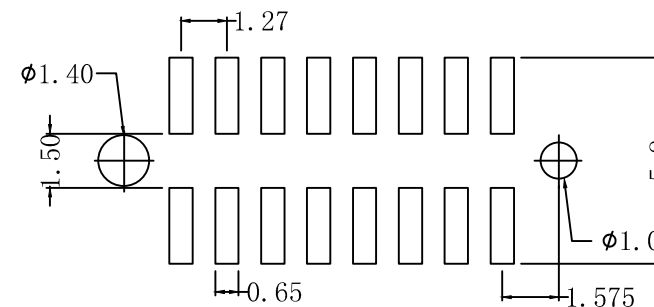

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X.° ±5° X. ±0.30	董道丽	20190321	PART. NO. CNT-F127-2*xx-GM-H/4.8-P-T	1.27*1.27 Female Header With Local Peg SMT Type
			.X° ±3° .X ±0.38	王芳芳	20190321		
			.XX° ±2° .XX ±0.25	王元中	20190321		
			.XXX° ±1° .XXX ±0.15				