


REV	DESCRIPTION	DATE


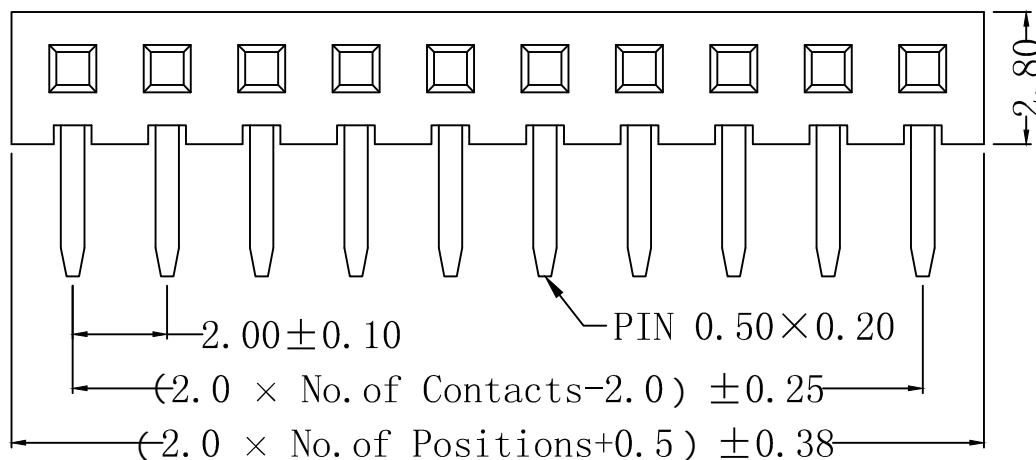


SPECIFICATIONS


Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

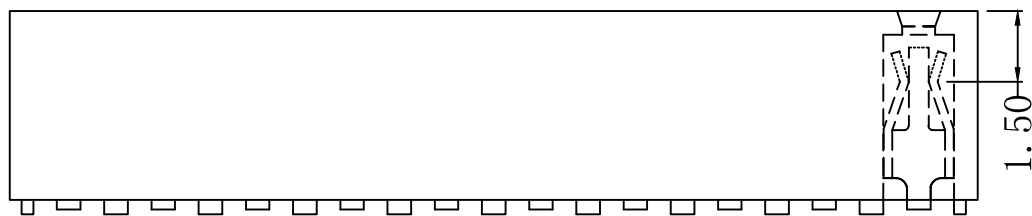


Recommended P. C. Board Hole Layout

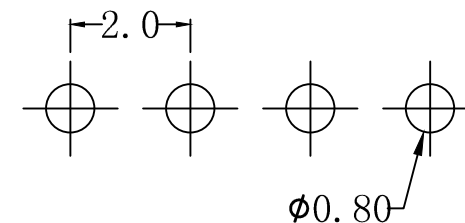

Ordering Information

CNT - F200 - 1*XX - GD - H - B

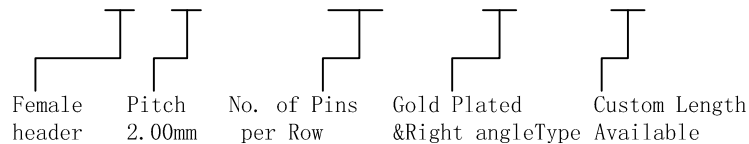

A	E
B	F
H	W

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE	DRAWN		CHECK	DATE	PART. NO.	2.00mm Female Header Single Row Right Angle Type	
4.40	mm	1:1	DRAWN		王芳芳	20190321	CNT-F200-1*xx-GD-H/B		
			DRAWN		王元中	20190321			