

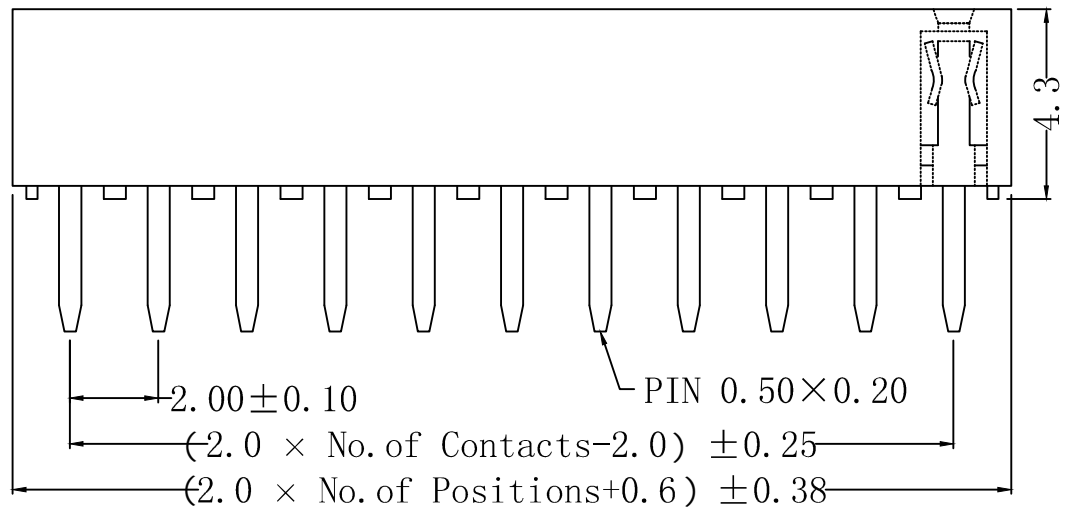


REV	DESCRIPTION	DATE

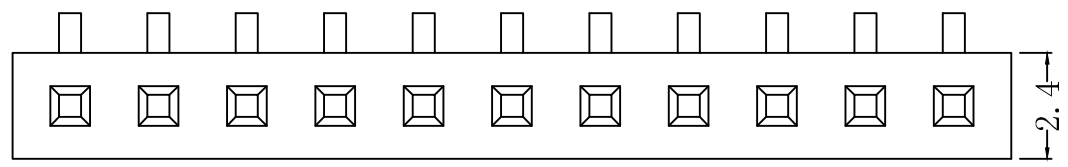

Type 3

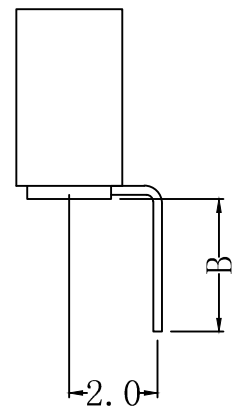


SPECIFICATIONS

- Current Rating: 2.0 Amps
- Insulator resistance: 1000MΩ Min.
- Dielectric withstanding: AC 500V
- Contact Resistance: 20 mΩ Max
- Operating Temperature: -40° C - +105° C


MATERIALS

- Contact Material: Copper Alloy
- Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
- Finish: Gold/Tin Plated over Nickle
- All materials must meet RoHS requirements

Ordering Information

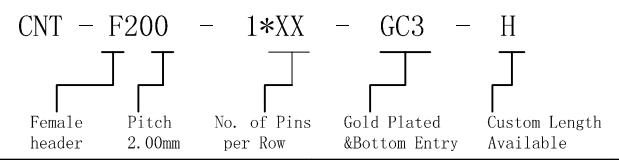

Recommended P. C. Board Hole Layout

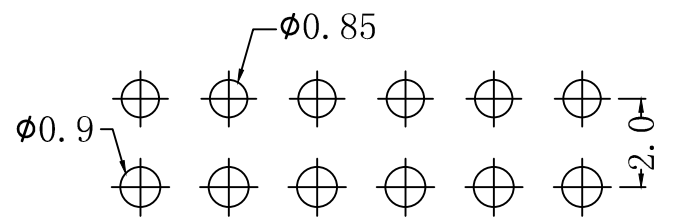

A		E	
B		F	
H	4.30	W	

CNT 肯耐特电子有限公司			GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
			.X°	±5°	X.	±0.30	董道丽	
REV.	UNIT	SCALE	.X°	±3°	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX°	±2°	王芳芳	20190321	CNT-F200-1*XX-GC3-430	2.00mm Female Header Single Row Bottom Entry Type
			.XXX°	±1°	王元中	20190321		